

SURFACE REFORMED FIBER BODY, LIQUID CONTAINER  
USING FIBER ABSORBER, AND METHOD OF PRODUCING  
FIBER ABSORBER FOR USE IN LIQUID EJECTION

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a fiber body for  
use in a container for containing liquid to be supplied  
to liquid ejecting heads for ejecting liquid for  
10 recording, and to a liquid container containing the  
above fiber body.

The present invention also relates to a material  
surface reforming method to modify wetting  
characteristics of the surface of fiber itself or fiber  
15 having been subjected to some treatment thereon, which  
is used as a negative pressure producing (generating)  
member in a liquid containing container, through  
modifying its properties and characteristics, and to a  
negative pressure producing member having been  
20 subjected to the above surface reforming.

In particular, the present invention relates to a  
surface reforming method by which surface reforming of  
fiber consisting of an olefin resin, which is  
environment friendly but hard to subject to surface  
25 treatment, can be achieved without failure, to fiber  
having a reformed surface, and to a method of producing  
the same.

## Related Background Art

In the ink jet recording field, an ink tank (ink container) through which a negative pressure is applied to recording heads have been used so as to prevent the leakage of ink. This type of ink tank contains a porous body or fiber body and, due to the capillary attraction of the porous body or fiber body, it holds ink and produces a negative pressure. Of the type, the ink tank containing a fiber body is particularly preferable in that, if the fiber body is arranged in such a manner as to keep its direction almost horizontal, the interface between ink and gas is kept horizontal even with fluctuations caused by the environmental changes, and hence, subjected to less variations in the direction of gravity.

As a fiber body contained in an ink tank, those obtained by spinning olefin resins are used in view of its easiness to recycle, because the casing of the ink tank consists of olefin resins such as PE (polyethylene) and PP (polypropylene). Since the wettability of olefin resins by ink, in particular, ink having a high surface tension such as black ink is poor, when injecting ink into an ink tank containing a fiber body consisting of an olefin resin, the vacuum injecting method is employed to forcibly inject ink into a tank in which a vacuum has been drawn.

On the other hand, in the field of ink jet

recording today, in order to obtain images of higher quality and ensure high fastness properties of the ink deposited on a recording medium, the improvement of ink itself is making steady progress. To be concrete,

5 pigment ink has come into use so as to improve to water (water-resistance) and a solvent is added to ink so as to heighten the fixing properties to a recording medium.

In the ink tanks currently in use which contain a

10 fiber body consisting of an olefin resin, however, since ink is injected into an ink tank by the vacuum injecting method, as described above, it is necessary to draw a vacuum in the tank, accordingly, the processes and equipment are becoming more complicated.

15 On the other hand, with respect to improvement of ink itself, the use of pigment ink and addition of a solvent to ink causes the viscosity of ink to be increased. As a result, the ability to supply ink to a recording head diminishes, and the higher recording

20 speed becomes, the more supplying ink becomes unlikely to catch up with the recording speed.

The properties and characteristics of an element itself are dependent on the properties of its constituents, and the element has been given desired

25 properties by modifying the properties of the constituents on its surface. The elements given desired properties include, for example, those having

on their surface reactive groups having reactivity such as water repellency and hydrophilic nature or reactive groups reactive with an adduct.

5 In the surface reforming technology currently in use, generally, the surface of an element is made to have a radical with ozone or UV or ozone in combination with UV and the element having a desired property is formed simply by chemically linking the radical with the primary ingredient of a surface treatment agent.

10 There is another technology in which the surface of an element is not made to have a radical, but a surface treatment agent having a desired property itself is attached to the element, so as to obtain the desired property momentarily; however, the desired  
15 property thus obtained does not last.

In particular, in the surface reforming of giving an environment-friendly olefin resin hydrophilic nature, only the technology has been known to obtain a temporary and partial hydrophilic state by intermingle  
20 a surfactant with the olefin resin in the presence of water.

In order to form an additional layer on an element, an adhesive and a primer have been used. When using a primer, such as a silane coupling agent, which  
25 only reacts and links with the surface of the element, the element itself needs to be treated so that it can react with the agent.

The technologies using a primer include, for example, the one using a primer consisting of the same material system as that of the element so as to utilize its affinity for the element. As a primer of this  
5 type, acid-modified chlorinated polypropylene has been known which is used when providing a facing material of polyurethane resin on the element of polypropylene. When using the same material system as that of the surface of the element, however, the volume of the  
10 element is inevitably increased, in addition, the technology is needed for applying a uniform and thin coating on the element. Moreover, when the element is fine or porous, it is impossible to apply a uniform coating on such an element to its interior. In  
15 particular, acid-modified chlorinated polypropylene is not soluble in water, accordingly, it cannot be used in the form of a water solution, and its applications are limited.

Accordingly, it can be said that there has been no  
20 surface treatment agents, including those using the different material system from the surface of the element, which can exist in the form of a water solution and be used in uniform and thin surface reforming irrespective of shape of the element.

25 On the other hand, with respect to PE and PP, each constituting a fiber body, their wettability by ink is poor (the contact angle to water is 80° or more),

though it varies depending on the type of ink.

Accordingly, in cases where PE or PP is used in a fiber body of an ink tank, a process of drawing a vacuum in the tank has been inevitably employed in injection of ink into the fiber body. This has required preparation of an injecting apparatus, causing the manufacturing process of the ink tank to be more complicated.

In addition, in the use of ink jet printers in recent years, with steady progress toward higher image quality and a wider variety of ink, there have been growing tendencies to add a solvent to ink, so as to increase the ink's ability to fix on paper, and to use pigment in ink. This, however, causes the viscosity of ink to be increased, and hence, the resistance to ink flow in a fiber body to be increased. As a result, there arises a problem that supplying ink is unlikely to catch up with the printing speed, while the printing speed tends to increase more and more in the latest printers.

There have been used ink tanks having a pressure contact body, which consists of a bundle of fiber arranged in the direction of liquid supplying, placed in its liquid supply opening for supplying liquid to a recording head. In these tanks, too, there arises a problem that, when the resistance to ink flow in the pressure contact body is increased, even if ink supplying in a high flow rate is demanded, supplying

ink is unlikely to catch up with the demand, from the viewpoint same as above.

The present invention is an epoch-making invention, which has been made based on the new  
5 knowledge and findings obtained during the investigation of the current technology standard.

With the surface reforming technology currently in use, in which the surface reforming is carried out simply by chemically linking the primary ingredient of  
10 a surface treatment agent with a radical produced on the surface of an element to be subjected to reforming, a uniform surface reforming cannot be achieved for the surface having a complicated topology, to say nothing of the interior portions of the negative pressure  
15 producing members having a complicated porous portion therein, such as sponge and composite fiber body used in the ink jet field.

Further, the use of the technology in which a surfactant is intermingled with the surface of an  
20 element in the presence of liquid can never achieve surface reforming for a porous body itself. When the surfactant is exhausted, the properties obtained are lost, and the properties of the surface immediately return to those of the surface itself.

25 Thus, it goes without saying that, for an olefin resin, which has such an excellent water repellency that its contact angle to water is 80° or more, there

has been no surface reforming method by which it is allowed to have a desired lyophilic nature for a long time of period.

Accordingly, the present inventors continued to  
5 investigate a method of conducting surface reforming on the surface of an olefin resin rationally and maintaining the reformed properties for a long time of period, while aiming at providing a method applicable to the surface reforming of any elements by clarifying  
10 the above method. After such an investigation, the present inventors directed their attention to using a liquid-type surface treatment agent on the assumption that the use of the liquid-type surface treatment agent would enable the surface reforming even for such  
15 negative pressure producing members as have a complicated shape.

At the same time, the present inventors newly found that the use of the surface energy in the relationship between the surface of a negative pressure  
20 producing member, which is to be reformed, and polymer having a reactive group makes it possible to control the balance of the surface and the reactive group and keep it in a desired state and that the analysis of the polymer itself enables the achievement of further  
25 improvement in durability and further stability in quality of the ink.

Further, the present inventors directed their



attention to negative pressure properties of a negative pressure producing (generating) member such as porous body, from the different viewpoint, and newly recognized a problem as described below.

5           In most cases negative pressure producing members currently in use are exposed to liquid at all times, and in some cases, even where a negative pressure chamber and a liquid containing chamber constitute an integrally formed unit, once liquid has been exhausted  
10   in part of the member which is to be exposed to liquid, the part is replenished with liquid; however, generally it is not assumed that the negative pressure producing members in state where liquid has been exhausted is replenished with liquid as is done in the ordinary  
15   apparatus. Thus, it has not yet been recognized even by those skilled in the art whether the negative pressure of a negative pressure producing member and the amount of liquid held by the same will return to their initial states even after replenishing the member  
20   with liquid.

          The present inventors examined how far the negative pressure of a negative pressure producing member and the amount of liquid the same holds will return to their initial states when a replenisher  
25   containing chamber (container or tank) is mounted after the liquid contained in a chamber for containing a negative pressure producing member is exhausted at an

arbitrary level. As a result, there was observed a tendency such that, for the liquid filled into the negative pressure producing member initially, the amount of the liquid held by the member was

5 considerably close to that of the initial state because the liquid was forcibly injected in some way, however, after simply repeating the replenishment, the amount became about a half as much as that of the initial state. This is probably because the air in the  
10 negative pressure producing member is hard to remove. And as the liquid was repeatedly replenished, the amount of the liquid held by the negative pressure producing member became smaller and the negative pressure was increased.

#### 15 SUMMARY OF THE INVENTION

The present inventors concentrated their energies on examining the problems as described above and have finally found that subjecting the surface of the fibers  
20 consisting of PE and PP to the surface treatment of giving hydrophilic nature thereto improves the wettability by ink and decreases the resistance to flow during the ink's movement, and moreover, what type of the surface treatment gives them a long-term  
25 hydrophilic nature. Furthermore, the present inventors have come to understand that the surface treatment of giving hydrophilic nature can be developed more

rationally using such a treatment in a desired area of the fiber body, as a negative pressure producing (generating) member, in accordance with the shape of the liquid container.

5           Specifically, one of the points the present invention aims at, in light of the problems of the prior arts as described above, is to provide a fiber body which can exhibit an ink supplying ability keeping up with the trends toward diversification of ink and  
10           high-speed printing and can make easier the ink injection, a liquid container having the same, and a method of subjecting the above fiber body to surface treatment of giving hydrophilic nature thereto.

          Further, the present invention aims mainly at  
15           providing an epoch-making lyophilic surface reforming method which enables a desired lyophilic surface reforming neither by the technique of modifying the properties of a negative pressure producing member by allowing the same to have a radical using ozone and  
20           ultraviolet rays nor by the technique of applying primers such as silane coupling agent on the surface of an element, causing a non-uniform coating thereon, as described above, but by a novel mechanism; a treatment liquid for use in the above method; a negative pressure  
25           producing member obtained by the above method; and a surface structure itself obtained by the lyophilic surface reforming, in particular, a fiber negative

pressure producing member having an excellent ability to return to the initial negative pressure even after repeating replenishment and an excellent ability to supply liquid. In particular, the present invention  
5 aims at providing a fiber absorber for use in liquid ejection and a liquid container with which desired properties, such as the property of decreasing resistance to flow of liquid during the liquid's movement, can be obtained by modifying the properties  
10 of the fiber in the liquid container through changing the level of surface treatment of giving lyophilic nature to the surface of an element.

The present invention aims mainly at providing an epoch-making lyophilic surface reforming method which  
15 enables a desired lyophilic surface reforming neither by the technique of modifying the properties of a negative pressure producing member by allowing the same to have a radical with ozone and ultraviolet rays nor by the technique of applying primers such as silane  
20 coupling agent on the surface of an element, causing a non-uniform coating thereon, as described above, but by a novel mechanism; a treatment liquid for use in the method; a negative pressure producing member obtained by the method; and a surface structure itself obtained  
25 by the lyophilic surface reforming, in particular, a fiber negative pressure producing member having an excellent ability to return to the initial negative

pressure even after repeating replenishment and an excellent ability to supply liquid.

5 The first object of the present invention is to provide a liquid treatment agent with which the entire internal surface of a negative pressure producing member having a complicated topology, such as porous body and finely processed element, can be subjected to surface treatment of giving a desired lyophilic nature thereto and a lyophilic surface reforming method using  
10 the liquid treatment agent.

The second object of the present invention is to provide a novel lyophilic surface reforming method which allows an olefin resin, which has been considered to be hard to subject to surface reforming, to retain  
15 lyophilic nature for a long period of time and a surface structure itself.

The third object of the present invention is to provide a novel lyophilic surface reforming method which enables the formation of a molecular level thin  
20 film, preferably a monomolecular level thin film, as a reformed surface itself, while causing no weight increase of a negative pressure producing member structure and a surface structure itself.

25 The fourth object of the present invention is to provide a surface treatment method which makes it possible to freely conduct a desired surface reforming by introducing a novel mechanism to lyophilic surface

reforming method itself.

The fifth object of the present invention is to provide a method of producing a lyophilic surface treatment agent for use in the surface of a negative pressure producing member which is simple and excellent  
5 in mass productivity.

The sixth object of the present invention is to provide an epoch-making method of subjecting the surface of a negative pressure producing member to  
10 lyophilic surface treatment which utilizes, from the viewpoint of the interfacial energy of a functional group (or a group of functional groups) a polymer has, an interfacial physical adsorption at an energy level almost the same as that caused by the polymer cleavage.

The seventh object of the present invention is to provide a novel lyophilic surface reforming method which enables the uniform reforming of the periphery of a negative pressure producing member and a surface structure itself on a level which cannot be achieved by  
15 the prior arts in terms of its entire periphery.

The other objects of the present invention will be understood from the following description and the present invention can also achieve complex objects of the arbitrary combinations of each of the above object.

In order to achieve the above objects, the present  
25 invention is a negative pressure producing fiber body for use in a container for containing a liquid, which

is to be supplied to a liquid ejecting head for  
ejecting the liquid for recording, in a manner that  
allows the liquid to be supplied, characterized in that  
it has an olefin resin at least on its fiber surface  
5 and the olefin resin has a lyophilic group in an  
oriented state on its surface.

The present invention is a fiber body for use in a  
container for containing a water-based liquid, which is  
to be supplied to a liquid ejecting head for ejecting  
10 the water-based liquid for recording, in a manner that  
allows the water-based liquid to be supplied,  
consisting of a fiber provided with a polymer at least  
part of its surface, characterized in that the above  
polymer includes a first portion having a hydrophilic  
15 group and a second portion having a group of which  
interfacial energy is lower than that of the above  
hydrophilic group and almost the same as the surface  
energy of the above part of the surface, the above  
second portion being oriented toward the above part of  
20 the surface, the above first portion being oriented in  
the direction different from the above part of the  
surface.

When the surface of the above fiber consists of an  
olefin resin, it is preferable that the above polymer  
25 is, for example, polyalkylsiloxane including a  
hydrophilic group and the above hydrophilic group have,  
for example, a polyalkylene oxide chain.

Preferably, the above olefin resin is polypropylene or polyethylene and the above polyalkylsiloxane is polyoxyalkylene-dimethylpolysiloxane.

5           The present invention is a liquid container containing the above fiber body as a negative pressure producing member.

          The present invention is a liquid container including a negative pressure producing member  
10       containing portion for containing the above fiber body as a negative pressure producing member and a liquid containing portion for supplying liquid to the above negative pressure producing member containing portion,  
          the above liquid containing portion and the above  
15       negative pressure producing member containing portion constituting an integrally or removably formed unit.

          The above liquid containing portion may be constructed in such a manner as to include an inner bag for containing liquid, which becomes deformed as the  
20       liquid contained therein becomes led out and thereby can produce a negative pressure, a casing for covering the above inner bag, and an atmosphere communication port which can introduce atmosphere between the above casing and the above inner bag.

25           The above fiber body, as a negative pressure producing member, contained in the negative pressure producing member containing portion has a polyolefin



resin on its entire surface and the above polyolefin resin has a hydrophilic group in a oriented state on its surface; accordingly, the surface of the fiber has a high wettability, which makes easier a liquid  
5 injection process even when the liquid has high surface tension. In addition, since the resistance to flow during the movement of recording liquid is decreased, it can keep up with the trend toward higher-speed printing, in particular, high flow rate liquid  
10 supplying to a liquid ejecting head.

The present invention is a liquid container which has a supply opening for supplying liquid to a liquid ejecting head and an atmosphere communication port for allowing the interior of the liquid container to  
15 communicate with the atmosphere, contains a negative pressure producing member, and is characterized in that a fiber body, as described above, is arranged in the interior portion of the above supply opening.  
Arranging a fiber body, which has been subjected to  
20 surface treatment of giving hydrophilic nature thereto, in the supply opening portion enables the decrease in resistance to ink flow and the increase in the ink's flow characteristics, while obtaining a desired capillary attraction, and hence, the ink supplying of a  
25 high flow rate. Furthermore, it enables the prevention of bubble retention which is caused when using the fiber body as a pressure contact body, in this point,

the increase in resistance to flow can be suppressed.

The present invention is a liquid container which has a supply opening for supplying liquid to a liquid ejecting head and an atmosphere communication port for allowing the interior of the liquid container to communicate with the atmosphere, contains a fiber body as a negative pressure producing member, and is characterized in that the above fiber body is partially subjected to surface treatment of giving lyophilic nature thereto only on the portion corresponding to the above supply opening and on the periphery portion thereof. Subjecting the fiber body to surface treatment of giving hydrophilic nature thereto only on the portions described above is also applicable to a liquid container which includes a negative pressure producing member containing portion for containing a fiber body as a negative pressure producing member, an atmosphere communication port for allowing the interior of the liquid container to communicate with the atmosphere, and a supply opening for supplying liquid held by the above fiber to a liquid ejecting head, and a liquid containing portion for leading out the liquid to the above negative pressure producing member containing portion, the above liquid containing portion and the above negative pressure producing member containing portion constituting an integrally or removably formed unit.

Subjecting the fiber body, as a negative pressure  
producing member, contained in the above liquid  
container to surface treatment of giving lyophilic  
nature thereto only on the portion corresponding to the  
supply opening and on the periphery portion thereof  
allows recording liquid to tend to exist on the supply  
opening and on the periphery thereof at all times;  
accordingly, the liquid supplying to a head is unlikely  
to be interrupted, in addition, bubbles are unlikely to  
flow in the recording head.

The present invention is a liquid container which  
includes a negative pressure producing member  
containing portion for containing a fiber body as a  
negative pressure producing member, an atmosphere  
communication port for allowing the interior of the  
above negative pressure producing member containing  
portion to communicate with the atmosphere, a supply  
opening for supplying liquid to a liquid ejecting head  
and a liquid containing portion for leading out the  
liquid to the above negative pressure producing member  
containing portion, the above liquid containing portion  
and the above negative pressure producing member  
containing portion constituting an integrally or  
removably formed unit, is characterized in that the  
above fiber body is partially subjected to surface  
treatment of giving lyophilic nature thereto only on  
the periphery of the planar layer existing over the

portion where the above negative pressure producing member containing portion communicates with the above liquid containing portion and intersecting the gravity direction.

5           Subjecting the fiber body, as a negative pressure producing member, contained in the above liquid container to surface treatment of giving hydrophilic nature thereto on the planar layer which exists over the portion where the above negative pressure producing member containing portion communicates with the above liquid containing portion and intersects the gravity direction enables the diffusion of the liquid flowing through the fiber on the portion having been subjected to surface treatment of giving hydrophilic nature  
10           thereto, even when the liquid or gas in the liquid containing portion expands due to some change in environment. Thus, an abrupt increase in pressure can be relaxed in the direction of horizontal section without increasing the volume of the negative pressure producing member containing chamber.  
15  
20

          The present invention is a liquid container which includes a negative pressure producing member containing portion for containing a fiber body as a negative pressure producing member, an atmosphere  
25           communication port for allowing the interior of the above negative pressure producing member containing portion to communicate with the atmosphere, a supply

opening for supplying liquid to a liquid ejecting head  
and a liquid containing portion for leading out the  
liquid to the above negative pressure producing member  
containing portion, the above liquid containing portion  
5 and the above negative pressure producing member  
containing portion constituting an integrally or  
removably formed unit, is characterized in that the  
above fiber body is partially subjected to surface  
treatment of giving lyophilic nature thereto at least  
10 on the liquid supplying area from the portion where the  
above negative pressure producing member containing  
portion communicates with the above liquid containing  
portion to the above supply opening.

Partially subjecting the fiber body, as a negative  
15 pressure producing member, contained in the above  
liquid container to surface treatment of giving  
lyophilic nature thereto at least on the liquid  
supplying area from the portion where the above  
negative pressure producing member containing portion  
20 communicates with the above liquid containing portion  
to the above supply opening enables the prevention of a  
liquid level from prominently dropping on the area  
having been subjected to surface treatment of giving  
lyophilic nature thereto, even when the liquid level is  
25 disturbed during the gas-liquid exchange because of the  
micro difference in density the fiber body has. Thus,  
the movement of the liquid from the liquid containing

portion to the negative pressure producing member  
containing portion is not interrupted by the air, and  
gas-liquid exchange operation is carried out stably.  
In addition, since the portion in the vicinity of the  
5 supply opening has been subjected to surface treatment  
of giving lyophilic nature thereto, the liquid tends to  
exist around the portion; accordingly, a recording  
liquid is hard to interrupt on the supply opening.  
Furthermore, when replacing the liquid containing  
10 portion with a new one, since the portion of the fiber  
body having been subjected to surface treatment of  
giving lyophilic nature thereto positively draws in the  
liquid, the recovery of a head is promptly achieved.  
And the amount of the liquid required for the head  
15 recovery can be controlled by varying the size of the  
area subjected to surface treatment of giving lyophilic  
nature thereto.

The present invention is a liquid container which  
includes a negative pressure producing member  
20 containing portion for containing a fiber body as a  
negative pressure producing member, an atmosphere  
communication port for allowing the interior of the  
above negative pressure producing member containing  
portion to communicate with the atmosphere, a supply  
25 opening for supplying liquid to a liquid ejecting head  
and a liquid containing portion for leading out the  
liquid to the above negative pressure producing member

containing portion, the above liquid containing portion  
and the above negative pressure producing member  
containing portion constituting an integrally or  
removably formed unit, is characterized in that the  
5 above fiber body is partially subjected to surface  
treatment of giving lyophilic nature thereto on the  
portion where the above negative pressure producing  
member containing portion communicates with the above  
liquid containing portion.

10           The present invention is a liquid container which  
includes a negative pressure producing member  
containing portion for containing a fiber body as a  
negative pressure producing member, an atmosphere  
communication port for allowing the interior of the  
15 above negative pressure producing member containing  
portion to communicate with the atmosphere, a supply  
opening for supplying liquid to a liquid ejecting head,  
a liquid containing portion for leading out the liquid  
to the above negative pressure producing member  
20 containing portion and an atmosphere introducing  
channel, which is provided in the vicinity of the  
portion where the above negative pressure producing  
member containing portion communicates with the above  
liquid containing portion, for causing a gas-liquid  
25 exchange in which the liquid is led out to the above  
negative pressure producing member containing portion  
subsequently after gas is introduced into the above

liquid containing portion, the above liquid containing portion and the above negative pressure producing member containing portion constituting an integrally or removably formed unit, is characterized in that the  
5 above fiber body is partially subjected to surface treatment of giving lyophilic nature thereto on the area corresponding to the above atmosphere introducing channel.

Partially subjecting the fiber body, as a negative  
10 pressure producing member, contained in the above liquid container to surface treatment of giving lyophilic nature thereto on the portion where the above negative pressure producing member containing portion communicates with the above liquid containing portion  
15 or the area corresponding to the above atmosphere introducing channel allows the liquid to be stably held by the portion having been made lyophilic, which can prevent gas-liquid exchange operation from starting, due to inadvertent air pass, when the gas-liquid  
20 exchange is still premature. Further, when the consumption of a recording liquid stops in the gas-liquid exchange state, the atmosphere communication channel or the atmosphere communication portion can be closed promptly by filling the portion of the fiber  
25 body corresponding to the atmosphere introducing channel with the liquid. Due to the functions described above, a stable gas-liquid exchange operation



becomes made possible. In addition, when removing the above liquid container so as to replace it with a new one, the liquid is unlikely to drop from the communication portion on the side of the above negative pressure producing member containing portion.

The liquid container of which fiber body has been partially subjected to surface treatment of giving lyophilic nature thereto may be constructed in such a manner as to include an inner bag for containing liquid, which becomes deformed as the liquid contained therein becomes led out and thereby can produce a negative pressure, a casing for covering the above inner bag, and an atmosphere communication port which can introduce atmosphere between the above casing and the above inner bag.

The present invention is a method of subjecting a fiber body, as a negative pressure producing member, contained in a liquid container having a supply opening for supplying liquid to a liquid ejecting head and an atmosphere communication port for allowing the interior of the liquid container to communicate with the atmosphere, besides the fiber body, to surface treatment of giving lyophilic nature thereto on the portion corresponding to a supply opening and the periphery thereof, comprising the steps of: injecting the above lyophilic treatment agent into the vicinity of the central portion of the above fiber body by using

a syringe containing the above lyophilic treatment agent and inserting the needle of the syringe into the above fiber body through the above atmosphere communication port; and sucking up the above lyophilic treatment agent through the above supply opening and discharging the same before the above lyophilic treatment agent reaches the inner surface of the above liquid container.

10 In order to achieve the above objects, the fiber absorber of the present invention for use in liquid ejection is a fiber absorber for use in an ink jet apparatus which consists of an olefin resin fiber and is contained in a liquid container of the apparatus so as to hold a liquid supplied to a liquid ejecting head under a negative pressure, characterized in that it has at least one portion having been subjected to surface treatment of giving lyophilic nature thereto on the surface of the fiber and the above portion having been subjected to surface treatment of giving lyophilic nature has a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature.

25 Another aspect of the fiber absorber of the present invention for use in liquid ejection is a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has a polymer compound

provided on at least part of its surface which should be subjected to surface treatment of giving lyophilic nature thereto and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure, characterized in that the above polymer compound has a first portion having a lyophilic group and a second portion having a group of which interfacial energy is lower than that of the above lyophilic group but is almost the same as the surface energy of the above surface part to be subjected to the above surface treatment and the portion having been subjected to surface treatment of giving lyophilic nature thereto and having lyophilic nature is obtained in such a manner as to orient the above second portion toward the above surface part and the above first portion in the direction different from the above surface part, the above surface part having a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area of which density decreases with the increase in distance away from the above first lyophilic area.

Another aspect of the fiber absorber of the present invention for use in liquid ejection is a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has a lyophobic surface at least part of which has been subjected to surface reforming to have a lyophilic nature and is contained

in a liquid container for holding a liquid supplied to  
a liquid ejecting head under a negative pressure,

characterized in that it has a lyophilic portion  
obtained by attaching the fragmented portions  
5 (fragment) having a lyophilic or a lyophobic group,  
which has been produced by the cleavage of polymer  
(compound) having both lyophilic and lyophobic groups,  
on the above lyophobic surface in such a manner as to  
orient the above lyophobic group toward the above  
10 lyophobic surface and in the direction different from  
the above lyophilic group,

the above lyophilic portion having a first  
lyophilic area relatively superior in lyophilic nature  
and a second lyophilic area relatively inferior to the  
15 above first lyophilic area in lyophilic nature.

Another aspect of the fiber absorber of the  
present invention for use in liquid ejection is a fiber  
absorber, as an assembly of numbers of fibers, for use  
in liquid ejection which has an olefin resin at least  
20 on its surface at least part of which is a reformed to  
have lyophilic nature and is contained in a liquid  
container for holding a liquid supplied to a liquid  
ejecting head under a negative pressure,

characterized in that the fiber of the fiber  
25 absorber has a wettable surface structure having a  
relatively long chain lyophilic group and a relatively  
short chain lyophobic group alternately which is

obtained in the following steps of: attaching on the surface of said fiber a treatment agent containing a polymer, which has a hydrophilic group and a group, as a constituent of the above olefin resin, having an  
5      interfacial energy almost the same as the surface energy of said olefin-based fiber surface thereon, a dilute acid as a catalyst for said polymer cleavage and alcohol; subjecting said polymer to cleavage by evaporating the treatment agent attached on the surface  
10     of said fiber and allowing said dilute acid to be a concentrated acid; and condensing the product of the polymer cleavage,

the above wettable surface structure having a first lyophilic area relatively superior in lyophilic  
15     nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature.

As described above, according to the fiber absorber of the present invention for use in liquid ejection, since the fiber absorber can be subjected to  
20     surface treatment of giving lyophilic nature thereto while allowing the lyophilic nature to have a distribution, the resistance to liquid flow in the fiber absorber can be freely set according to the need while utilizing the behavior of the lyophilic group  
25     (this is based on the fact that the more lyophilic groups, the lower resistance to flow). Thus, the fiber absorber allows a liquid to be held in the liquid

container and supplied to a liquid ejecting head in an optimal state according to the liquid behavior required in the liquid container.

5 A liquid container of the present invention has a container casing which includes a supply opening for supplying a liquid to a liquid ejecting head and an atmosphere communication port for communicating with the atmosphere and a fiber absorber for use in liquid  
10 ejection which is selected from those of the present invention described above and contained in the above container casing to hold the liquid therein using a negative pressure.

According to the liquid container described above, a liquid can be held therein and supplied to a liquid  
15 ejecting head in an optimal state by arranging a first lyophilic area of the fiber absorber for use in liquid ejection in a predetermined position of the liquid container according to the liquid behavior.

More specifically, the liquid container of the  
20 present invention has a container casing which includes a supply opening for supplying a liquid to a liquid ejecting head and an atmosphere communication port for communicating with the atmosphere and a fiber absorber which consists of an olefin resin, has been subjected  
25 to surface treatment of giving lyophilic nature thereto at least on part thereof in such a manner as to be allowed to have stronger lyophilic nature as it becomes

away from the above supply opening, and is contained in the above container casing to hold the liquid therein using a negative pressure.

According to the liquid container described above,  
5 since the fiber absorber contained in the container casing has been subjected to surface treatment of giving lyophilic nature thereto in such a manner as to be allowed to have more lyophilic groups (stronger lyophilic nature) as it becomes away from the above  
10 supply opening, the resistance of liquid flow becomes smaller at a location away from the supply opening. As a result, even at a location away from the supply opening, the liquid flows easily toward the supply opening, which improves the efficiency of using the  
15 liquid in the liquid container. With respect to liquid injection into the liquid container, as long as it is done from the area having stronger lyophilic nature, the liquid can be injected into the liquid container without drawing a vacuum therein.

20 Another aspect of the liquid container of the present invention has a container casing which includes a supply opening for supplying a liquid to a liquid ejecting head and an atmosphere communication port for communicating with the atmosphere and a fiber absorber  
25 which consists of an olefin resin, has been subjected to surface treatment of giving lyophilic nature thereto at least in the vicinity of the above supply opening in

such a manner as to be allowed to have weaker lyophilic nature as it becomes away from the above supply opening, and is contained in the above container casing to hold the liquid therein using a negative pressure.

5           According to the liquid container described above, since the fiber absorber contained in the container casing has been subjected to surface treatment of giving lyophilic nature thereto in the vicinity of the supply opening in such a manner as to be allowed to  
10   have weaker lyophilic nature as it becomes away from the above supply opening, the liquid can be held without increasing the resistance to liquid flow in the vicinity of the supply opening, which prevents the liquid supplying to the liquid ejecting head from being  
15   interrupted. With respect to liquid injection into the liquid container, it can be done from the supply opening without drawing a vacuum therein.

          Another aspect of the liquid container of the present invention has a negative pressure producing  
20   member containing chamber which includes a supply opening for supplying a liquid to a liquid ejecting head and an atmosphere communication port for communicating with the atmosphere and contains therein a fiber absorber consisting of an olefin resin for  
25   holding a liquid under negative pressure; and a liquid containing chamber which communicates with the above negative pressure producing member containing chamber



and has a liquid containing portion substantially in a sealed state except the portion communicating with the above negative pressure producing member containing chamber, the above fiber absorber existing over the above communication portion as a layer intersecting the gravity direction and having a portion having been subjected to surface treatment of giving lyophilic nature thereto in such a manner as to be allowed to have weaker lyophilic nature on its upper portion.

In the above liquid container, once the liquid in the negative pressure producing member containing chamber is consumed to such a extent that the liquid level thereof reaches the portion communicating with the liquid containing portion, then the communication portion starts to communicate with the atmosphere via the atmosphere communication portion of the negative pressure producing member containing chamber and the fiber absorber, and the air is introduced into the liquid containing chamber. At the same time, the liquid in the liquid containing chamber moves to the negative pressure producing member containing chamber via the communication portion, which allows the negative pressure in the negative pressure producing member containing chamber to be kept constant.

If the liquid and gas in the liquid containing chamber abruptly expand due to environmental changes etc., the liquid in the liquid containing chamber flows

in the negative pressure producing member containing  
chamber; however, the liquid is absorbed into the fiber  
absorber by the buffer function of the negative  
pressure producing member containing chamber. Since  
5 the fiber absorber exists over the above communication  
portion as a layer intersecting the gravity direction  
and has a portion having been subjected to surface  
treatment of giving lyophilic nature thereto in such a  
manner as to be allowed to have weaker lyophilic nature  
10 on its upper portion, the liquid having flowed into the  
negative pressure producing member containing chamber  
is trapped into the portion having been subjected to  
surface treatment of giving lyophilic nature thereto  
from the lower to the upper portion in sequence. Thus,  
15 even if the upper volume of the negative pressure  
producing member containing chamber is not needlessly  
large, the buffer function described above is fully  
performed.

Further, the present invention provides a method  
20 of producing the above-described fiber absorber of the  
present invention for use in liquid ejection. One  
aspect of the method is a method of producing a fiber  
absorber, as an assembly of numbers of fibers, for use  
in liquid ejection which has a lyophilic group provided  
25 at least on the part of its surface which should be  
subjected to surface treatment of giving lyophilic  
nature thereto and is used for holding a liquid

supplied to a liquid ejecting head under a negative pressure, the method including a first step of providing a liquid, which contains a polymer including a first portion having the above lyophilic group and a second portion having a group of which interfacial energy is different from that of the above lyophilic group but is almost the same as the surface energy of the above surface part to be subjected the above surface treatment, to the part which should be subjected to surface treatment of giving lyophilic nature thereto in such a manner as to form a first area where the density of the liquid provided is relatively high and a second area where the density of the same is relatively low; and a second step of obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to orient the above second portion of the above polymer toward the above surface part and the above first portion of the same in the direction different from the above surface part.

Another aspect of the method of producing a fiber absorber of the present invention for use in liquid ejection is a method of producing a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has a lyophilic group provided at least on the part of its surface which should be subjected to

surface treatment of giving lyophilic nature thereto and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure, the method including a first step of providing the above part of the surface with a liquid containing a fragmented product which has a first portion with a lyophilic group and a second portion with a group having an interfacial energy different from that of the above lyophilic group but almost the same as the surface energy of the above part of the surface, the above fragmented product being obtained by subjecting a polymer to cleavage which has the above first and second portions in such a manner as to form a first area where the density of the liquid provided is relatively high and a second area where the density of the same is relatively low; and a second step of obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to orient the second portion of the above fragmented product toward the above part of the surface and the above first portion of the same in the direction different from the above part of the surface; and a third step of condensing at least part of the oriented portions of the above fragmented product on the above part of the surface into a polymer.

Another aspect of the method of producing a fiber absorber of the present invention for use in liquid ejection is a method of producing a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has an olefin resin at least on its surface, has a lyophilic group provided at least on the part of the above surface, and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure, the method including a first step of providing the above part of the surface with a liquid in which a polymer of alkylsiloxane including a lyophilic group is dissolved in such a manner as to form a first area where the density of the liquid provided is relatively high and a second area where the density of the same is relatively low; and a second step of obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to orient the above alkylsiloxane toward the above part of the surface and the above lyophilic group in the direction different from the above part of the surface.

Another aspect of the method of producing a fiber absorber of the present invention for use in liquid ejection is a method of producing a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has an olefin resin at least on its

surface, has a lyophilic group provided at least on the part of the above surface, and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure, the method including a first step of providing the above part of the surface with a liquid in which a fragmented product obtained by subjecting a polymer of alkylsiloxane including a lyophilic group to cleavage is dissolved in such a manner as to form a first area where the density of the liquid provided is relatively high and a second area where the density of the same is relatively low; and a second step of obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to condense the above fragmented product on the above part of the surface, in addition, orient the above alkylsiloxane toward the above part of the surface and the above lyophilic group in the direction different from the above part of the surface.

Another aspect of the method of producing a fiber absorber of the present invention for use in liquid ejection is a method of producing a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has an olefin resin at least on its surface, has a lyophilic group provided at least on the part of the above surface, and is used for holding a

liquid supplied to a liquid ejecting head under a negative pressure, the method including the steps of: forming a fiber surface having a liquid, which contains polyalkylsiloxane, acid and alcohol, attached thereon in such a manner as to form a first area where the density of the liquid attached is relatively high and a second area where the density of the same is relatively low; and obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to heat and dry the liquid attached on the above fiber surface at temperatures higher than room temperature and lower than the melting point of the above olefin resin.

Another aspect of the method of producing a fiber absorber of the present invention for use in liquid ejection is a method of producing a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has an olefin resin at least on its surface, has a lyophilic group provided at least on the part of the above surface, and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure, the method including the steps of: forming a fiber surface having a liquid, which contains polyalkylsiloxane, acid and alcohol, attached thereon in such a manner as to form a first area where the density of the liquid attached is relatively high and a

second area where the density of the same is relatively low; and obtaining a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature in such a manner as to dry the liquid attached on the above fiber surface and, during the drying process, orientate the above lyophilic group in the direction opposite to the above fiber surface so as to subjecting the fiber surface to surface treatment of giving lyophilic nature thereto.

A surface reforming method of the present invention is a method of subjecting the a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection which has a lyophobic surface and is used for holding a liquid supplied to a liquid ejecting head under a negative pressure to surface reforming so as to reform the above lyophobic surface into a lyophilic one, characterized in that it includes a step of attaching on the above lyophobic surface a fragmented product having both lyophilic and lyophobic groups, which is produced by subjecting a polymer having both lyophilic and lyophobic groups to cleavage, in such a manner as to orient the above lyophobic group toward the surface and the above lyophilic group in the direction different from that of the above lyophobic group so as to have a first lyophilic area relatively superior in lyophilic nature and a second lyophilic



area relatively inferior to the above first lyophilic area in lyophilic nature.

Another aspect of the surface reforming method of the present invention is a method of subjecting a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection to surface reforming on part of its surface, characterized in that the surface reforming is performed in such a manner as to condense a cleavage polymer, which has been oriented in accordance with the affinity of the interfacial energy of a group similar to the surface energy of the part of the surface of the above fiber, on the above part of the surface, so as to have a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature.

Another aspect of the surface reforming method of the present invention is a method of subjecting a fiber absorber, as an assembly of numbers of fibers, for use in liquid ejection to surface reforming on part of its surface using a liquid polymer, characterized in that it includes a condensation step of condensing a polymer fragmented product, which has a first group which can be subjected to cleavage and condensation and comprises a lyophilic group and a second group of which interfacial energy is almost the same as the surface energy of the part of the surface of the above fiber,

into a polymer on the above part of the surface, so as to have a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature.

A wettable surface structure of the fiber assembly of the present invention is a wettable surface structure of a fiber assembly used for holding a liquid to be supplied to a liquid ejecting head under negative pressure, characterized in that it has a lyophilic portion including a polymer having relatively long chain lyophilic groups and relatively short chain lyophobic groups alternately, the above lyophilic portion having a first lyophilic area relatively superior in lyophilic nature and a second lyophilic area relatively inferior to the above first lyophilic area in lyophilic nature.

The terms "lyophilic area relatively superior in lyophilic nature" used herein means any of the cases where the area shows stronger lyophilic nature than the other lyophilic areas because it has more lyophilic groups per area than the others and where the area can maintain a relatively lyophilic state for a longer period of time because lyophilic groups are attached on the area more strongly than the other lyophilic areas.

On the other hand, the terms "lyophilic area relatively inferior in lyophilic nature" used herein

means any of the cases where the area shows weaker lyophilic nature than the other lyophilic areas and where the area can maintain a relatively lyophilic state only for a shorter period of time.

5

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagrammatic sectional view of a liquid containing container according to a first embodiment of the present invention;

10 Figs. 2A and 2B are diagrammatic sectional views of a liquid containing container according to a second embodiment of the present invention;

Fig. 3 is a figure showing an example of a hydrophilically treated region in an absorber of a liquid containing container according to a second  
15 embodiment of the present invention;

Fig. 4 is a figure showing an example of a hydrophilically treated region in an absorber of a liquid containing container according to a second  
20 embodiment of the present invention;

Fig. 5 is a figure showing an example of a hydrophilically treated region in a negative pressure creating member (absorber) in an ink jet head cartridge, which is the liquid containing container  
25 according to a third embodiment of the present invention;

Fig. 6 is a figure showing an example of a

hydrophilically treated region in a negative pressure  
creating member (absorber) in the ink jet head  
cartridge, which is the liquid containing container  
according to a third embodiment of the present  
5 invention;

Fig. 7 is a figure showing an example of a  
hydrophilically treated region in a negative pressure  
creating member (absorber) in an ink jet head  
cartridge, which is the liquid containing container  
10 according to a third embodiment of the present  
invention;

Fig. 8 is a figure showing an example of a  
hydrophilically treated region in a negative pressure  
creating member (absorber) in an ink jet head  
15 cartridge, which is the liquid containing container  
according to a third embodiment of the present  
invention;

Figs. 9A, 9B, 9C and 9D are figures showing an  
example of a moving status of ink in an ink jet head  
20 cartridge, which is the liquid containing container  
according to a third embodiment of the present  
invention;

Fig. 10 is a figure explaining an effect of a  
hydrophilically treated region in gas-liquid  
25 replacement in an ink jet head cartridge, which is the  
liquid containing container according to a third  
embodiment of the present invention;

Fig. 11 is a figure showing an example of a hydrophilically treated region in a negative pressure creating member (absorber) in an ink jet head cartridge, which is the liquid containing container according to a third embodiment of the present invention;

Fig. 12 is a diagrammatic sectional figure showing the liquid containing container, which has a pressurized contact body, according to a fourth embodiment of the present invention;

Fig. 13 is a diagrammatic sectional figure showing the liquid containing container according to a fifth embodiment of the present invention;

Figs. 14A and 14B are figures explaining a difference between effects in presence and absence of the hydrophilically treated region shown in Fig. 13;

Figs. 15A, 15B, 15C, 15D and 15E are figures explaining a hydrophilically treating method for the absorber in the liquid containing container according to a sixth embodiment of the present invention;

Fig. 16 is a diagrammatic perspective view showing a liquid discharge recording apparatus;

Figs. 17A and 17B are figures diagrammatically showing an attaching form, which is made on a surface of an element (base material) to be reformed, of a polymer of a surface reforming agent to the element surface in a surface reforming method applicable to the

present invention; Fig. 17A is a figure explaining the case where both a second group as a functional group and a first group for attaching to the surface of the element are located in a side chain of the polymer and  
5 Fig. 17B is a figure explaining the case where the first group is included in a main chain;

Fig. 18 is a figure diagrammatically showing a status in which a treating liquid, which contains the polymer of the surface reforming agent, is applied to  
10 form an applied layer on the base material according to the surface reforming method applicable to the present invention;

Fig. 19 is a conceptual rendering showing a process to remove partially a solvent contained in the applied layer containing the polymer of the surface  
15 reforming agent formed on the base material according to the surface reforming method applicable to the present invention;

Fig. 20 is a diagrammatic figure showing a partial  
20 dissociation process, of the polymer of the surface reforming agent, included in a process to remove partially the solvent contained in the applied layer containing the polymer of the surface reforming agent and induced by an acid to be added to a treating  
25 solution;

Fig. 21 is a diagrammatic figure showing a process, of the polymer of the surface reforming agent,

included in a process to remove further the solvent  
contained in the applied layer containing the polymer  
of the surface reforming agent and forming an  
orientation of the polymer of the surface reforming  
5 agent or of fragments of the polymer thereof;

Fig. 22 is a diagrammatic figure showing a  
process, in which the solvent contained in the applied  
layer is dried to remove and the polymer of the surface  
reforming agent or fragments of the polymer thereof  
10 orient to attach to and be fixed to the surface;

Fig. 23 is a diagrammatic figure showing a  
process, in which small molecules, which are produced  
by dissociation of the polymer of the surface reforming  
agent that attaches and is fixed to the surface, binds  
15 to each other again by a condensation reaction;

Fig. 24 is a diagrammatic figure showing a case  
where the surface reforming method applicable to the  
present invention is applied to hydrophilic treatment  
for a water repellent surface and an effect of addition  
20 of water to a treating solution;

Figs. 25A, 25B, 25C and 25D are diagrammatic  
figures showing a PE-PP fibrous body usable for an ink  
absorber in an ink tank; Figs. 25A to 25D show a mode  
of use as the ink absorber in the ink tank, a total  
25 shape of the PE-PP fibrous body, a direction F1 of the  
orientation of the fiber, and the direction F2  
orthogonal to the F1, the status before the above

described PE-PP fibrous body is made by heat fusion,  
and the status in which the above described PE-PP  
fibrous body has been made by heat fusion,  
respectively;

5           Figs. 26A and 26B are examples of the sectional  
structure of the PE-PP fibrous body shown in Figs. 25A  
and 25B are figures diagrammatically showing the  
example in which a PE sheath material covers almost  
concentrically over the PP core material and the  
10          example in which the PE sheath material covers  
eccentrically over the PP core material, respectively;

          Figs. 27A, 27B, 27C, 27D, 27E and 27F show  
diagrammatic figures showing a case where the surface  
reforming method according to the present invention is  
15          applied to hydrophilic treatment for the water  
repellent surface of the PE-PP fibrous body shown in  
Figs. 27A, 27B, and 27C diagrammatically show an  
untreated fibrous body, the process to soak the fibrous  
body in hydrophilic treatment solution, and the process  
20          to compress the fibrous body to remove an excessive  
treatment solution after soaking, respectively; Figs.  
27D, 27E, and 27F are partially enlarged views of Figs.  
27A, 27B, and 27C, respectively;

          Figs. 28A, 28B, 28C, 28D, 28E and 28F shows the  
25          process following to the process shown in Figs. 28A,  
28B and 28C diagrammatically show the applied layer  
formed on the surface of the fibrous body, the process



to remove by drying the solvent contained in the applied layer, and a cover of hydrophilic treatment agent covering over the surface of the fiber, respectively; Figs. 28D, 28E, and 28F are partially enlarged views of Figs. 28A, 28B, and 28C, respectively;

Fig. 29 shows a 150 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of an untreated PP-PE fiber of a reference example 1 (untreated PP-PE fiber absorber);

Fig. 30 shows a 500 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of an untreated PP-PE fiber of a reference example 1 (untreated PP-PE fiber absorber);

Fig. 31 shows a 2000 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of an untreated PP-PE fiber of a reference example 1 (untreated PP-PE fiber absorber);

Fig. 32 shows the 150-times enlarged SEM photograph indicating a shape and the surface condition of an acid-treated PP-PE fiber of a comparative example 1 (PP-PE fiber absorber treated by an acid and an alcohol only);

Fig. 33 shows a 150 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of a treated PP-PE fiber of an

example 1 (hydrophilically treated PP-PE fiber absorber) to which the principle was applied;

Fig. 34 shows a 500 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of a treated PP-PE fiber of an example 1 (hydrophilically treated PP-PE fiber absorber) to which the principle was applied;

Fig. 35 shows a 2000 times enlarged SEM photograph, replacing to a drawing, indicating a shape and the surface condition of a treated PP-PE fiber of an example 1 (hydrophilically treated PP-PE fiber absorber) to which the principle was applied;

Fig. 36 is a process chart showing an example of a manufacturing process, through the deforming surface treatment, applicable to the present invention;

Fig. 37 is a figure diagrammatically showing an example of a presumable distribution of hydrophilic groups and hydrophobic groups the surface prepared by the deforming surface treatment applicable to the present invention;

Figs. 38A, 38B and 38C are figures showing an example of the hydrophilic treatment, applicable to the present invention, in a negative pressure creating member (the absorber) in the ink jet head cartridge;

Fig. 39 is a longitudinal section view of the ink tank according to a seventh embodiment of the present invention;

Figs. 40A and 40B are diagrammatic figures showing an ink path, from respective region A to E to a supply opening, as a tube in order to explain a flow resistance of ink in the fiber absorber in the ink tank shown in the Fig. 39 show a static view and a dynamic view, respectively;

Figs. 41A and 41B are figures explaining an example of the hydrophilic treatment method for the fiber absorber shown in Fig. 39;

Figs. 42A, 42B and 42C are figures explaining another example of the hydrophilic treatment method for the fiber absorber shown in Fig. 39;

Fig. 43 is a figure explaining a further example of the hydrophilic treatment method for the fiber absorber shown in Fig. 39;

Figs. 44A and 44B are figures explaining a furthermore example of the hydrophilic treatment method for the fiber absorber shown in Fig. 39;

Fig. 45 is a longitudinal section view of an example of modification of the ink tank according to a seventh embodiment of the present invention;

Figs. 46A, 46B and 46C are figures explaining an example of the hydrophilic treatment method for the fiber absorber shown in Fig. 45;

Fig. 47 is a longitudinal section view of the ink tank according to a eighth embodiment of the present invention;

Fig. 48 is a transverse section view (sectional view along with a 48-48 line of Fig. 47) of the ink tank according to a eighth embodiment of the present invention;

5            Fig. 49 is a graph showing a relation between an internal pressure of the ink tank with an ink leading amount from the supply opening of the ink tank according to a eighth embodiment of the present invention, in comparison with the case where the  
10           hydrophilic treatment is not carried out;

Figs. 50A, 50B and 50C are figures explaining an example of the hydrophilic treatment method for the fiber absorber of the ink tank shown in Fig. 47;

15           Fig. 51 is a diagrammatic sectional figure showing the ink jet head cartridge, which is the liquid containing container, according to a ninth embodiment of the present invention;

20           Fig. 52 is a figure explaining a flow of ink in the absorber, when ink flows in a negative pressure regulating chamber container according to an abrupt pressure change of the ink jet head cartridge shown in Fig. 51;

25           Fig. 53 is a diagrammatic section view of the example of modification of the ink jet head cartridge according to a ninth embodiment of the present invention; and

Figs. 54A, 54B, 54C, 54D and 54E are figures

explaining the ink tank which is a tenth embodiment of the present invention.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

5           An embodiment of the present invention will be described below with reference to the drawings. In the present invention, a term "liquid affinity property" is used for a property excellent in a wettability against a liquid to be contained. In the embodiment described  
10 below, an aqueous ink is explained as the example of the ink and the case, where a hydrophilic property among liquid affinity properties is imparted thereto, will be explained. However, a kind of ink in the present invention is not restricted to aqueous one, but  
15 may be an oily ink. In this case, the property to impart to the surface is an lipophilic property. In addition, a liquid held by the fibrous absorber is not restricted to ink, but includes various kinds of liquids supplied to a liquid discharging head.

20           The liquid containing container will be described for a representing one to hold a recording liquid used for an ink jet recording head or a fixing liquid of the recording liquid.

25           First, below is a detailed description of the hydrophilic treatment of the fibrous absorber in the present embodiment together with a principle thereof. In the present invention, an object of the hydrophilic

treatment is an external surface exposed to an outer part of the fiber composing the fibrous absorber. However, in the following description, an explanation will be given as the surface reform for an element in a wider sense.

The surface reforming method described below is a method to make the surface reform as the purpose possible by attaching the polymer (or, fragments (fragmented product) of the polymer) to the surface by making a specific orientation and imparting a property, which is possessed by a functional group of the polymer (or, fragments of the polymer), to the surface, using a functional group of a molecule contained in a substance constructing the surface of the element.

Here, "element" means that formed from various materials and holding a specific external shape and thus, accompanied by the external shape, it has the external surface exposed to outside. In addition, inside thereof, the element may be that having a space and cavity parts, which includes the part communicating with outside or a hollow part. An internal surface (internal wall) partitioning these parts can be a partial surface as the object for the surface reform in the present invention. The hollow part includes that having the inner surface diving it and being a space completely insulated from outside. However, those, which allow supplying a surface-treating liquid to

inside the hollow part before reform treatment and become the hollow part insulated from outside after reform treatment, can be the object of the treatment of the present invention.

5           As described above, the surface reform method according to the present invention is applied to the object which is the surface, among all surfaces posses by various kinds of elements, capable of contacting a liquid solution for surface treatment from outside  
10           without deterioration of the shape of the element. Therefore, each or both the external surface of the element and the internal surface connected thereto are assigned to the object of the partial surface. Besides, the present invention also includes changing  
15           the property of the partially divided surfaces selected from the surface being the object. According to selection, reform of a desired partial surface region includes the a mode to select the external surface of the element and the internal surface to be connected  
20           thereto.

          In the above described surface reform, a part, which is reformed and composes at least a part of the surface possessed by the element, is treated. In other words, the part means a part from the surface of the  
25           element or whole surface of the element selected according to requirement.

          "Fragmentation of the polymer" to small molecules

in the present specification means production of those, made by cleavage of a part of the polymer, or monomers. In practical example, included one is all those produced by cleavage of the polymer by a cleaving catalyst such as acid. "Polymer film formation" includes formation of real film or different orientation of respective parts toward a two-dimensional surface.

10 Preferably, the "polymer" in the present specification comprises a first part having a functional group and a second part having an interface energy differing from the interface energy of this functional group and almost equal to a surface energy of the objective element for attaching, and differs  
15 from a component material of the surface of the above described element. Therefore, according to the component material of the element to be reformed, a desired polymer may be freely selected from polymers having the interface energy almost equal to the surface  
20 energy of the surface of the element. It is more preferable that the "polymer" has properties cleavable and condensable after cleavage. Other than the above described first part and the second part, the functional group may be contained. In this case, in  
25 hydrophilic treatment as an example, it is preferable that a hydrophilic group as the functional group has a long chain relatively to the functional group



(relatively, hydrophobic group to the above described hydrophilic group) other than the first and second parts.

5       The part to be subjected to the surface treatment in the present invention may be those made of a single material and may be a complex material made of some kinds of materials; in consideration of the quality of the surface to be treated, the polymer differing from the component material can be used.

10       Below is a specific explanation of the principle on which the surface reform is carried out by using the case where the surface composed of the single substance is reformed in order to make explanation of the principle easy.

15       "The principle on which the surface reform is carried out"

20       The surface reform, applicable to the present invention, of the element is achieved by using the polymer, which is made by binding of a main skeleton (a generic name of a main chain, a side chain, or a group) having the interface energy almost equal to the surface (interface) energy of the surface of the element (surface of base material) and the group having the interface energy differing from the surface (interface) energy of the surface of the element, attaching the  
25       polymer to the surface of the element by using the main skeleton, contained in the surface reform agent, having

the interface energy almost equal to the interface energy of the surface of the element, and forming the polymer film (polymer cover), in which the group having the interface energy differing from the interface  
5 energy of the surface of the element, is oriented toward outside opposite to the surface of the element.

In other words in a different point of view concerning the polymer used as the above described surface reforming agent, it can be understood as that  
10 comprising the first group having a essentially different affinity from the group exposed to the surface of the element before surface reform and the second group having a substantially similar affinity to the group exposed to the surface of the element and  
15 contained in a repeated unit of the main skeleton.

Figs. 17A and 17B diagrammatically show a representative example of such orientation morphology. Fig. 17A shows the case using the polymer, in which the first group 1-1 and the second group 1-2 are bound as  
20 side chains and Fig. 17B shows the case in which the second group 1-2 composes a main chain 1-3 and the first group 1-1 composes a side chain.

When orienting as shown in Figs. 17A and 17B, the superficial surface (outside) of the base material 56  
25 constituting the surface to be subjected to the surface reform of the element become s a situation in which the group 1-1 having the different interface energy from

the surface (interface) energy of the base material 56 is oriented to the surface and thus, a property of the group 1-1 having the different interface energy from the surface (interface) energy of the base material 56 is used for reform of the surface. Here, the surface (interface) energy of the base material 56 has been determined by the substance and the molecule, which constitute the surface and are derived from the group 55 exposed to the surface. In the example shown in Figs. 17A and 17B, the first group 1-1 works as the functional group for surface reform. If the surface of the base material 56 is hydrophobic and the first group 1-1 is hydrophilic, hydrophilicity is imparted to the surface of the base material 56. If the first group 1-1 is hydrophilic and the group 55 of the base material 56 side is hydrophobic, when polysiloxane, for example, is used as described later, it is presumed that the situation shown in Fig. 37 exists on the surface of the base material 56. In this situation, by adjusting a balance of the hydrophilic group between the hydrophobic group on the surface of the base material 56 after reform, in the case where water and aqueous liquid mainly composed of water are passed through the base surface after reform treatment, passing condition and a passing flow rate can be regulated. By using the fibrous body, which is made of a polyolefin resin, for example, and has such surface condition on the external

wall surface of the fiber, in the ink tank installed as a component, integrated with the ink jet recording head, or as a separate component, filling ink in the ink tank and supplying ink from the ink tank to the head are very easily carried out and also, by keeping an appropriate negative pressure inside the ink tank, a position of an ink interface (meniscus) can be better kept around a ejection orifice of the recording head immediately after ink ejection. By this, a component, of which static negative pressure is higher than a dynamic negative pressure, most suitable for a negative pressure-creating member to hold ink for ink supply to the ink jet recording head can be provided.

Particularly, in case of a structure of the surface of the fiber of Fig. 37, the hydrophilic group 1-1 is a polymer group and hence, has a longer in a structure than that of a methyl group (hydrophobic group) of the side chain of the same side. Therefore, the hydrophilic group 1-1, when ink flows, tilts toward the flow rate, along with the surface of the fiber (and also, covers substantially the above described methyl group). As a result, the flow resistance greatly decreases. Oppositely, when ink supply is stopped and the meniscus is formed between fibrous bodies, the hydrophilic group 1-1 is oriented to a direction toward ink, in other words, a vertical direction against the surface of the fiber (the above described methyl group

is exposed to the surface of the fiber) and thus, the balance can be kept between hydrophilic groups (large) and hydrophobic groups (small) in a molecule to create a sufficient negative pressure. Resembling to the

5 above described embodiment in which the hydrophilic group 1-1 is formed by many (-C-O-C-) bonds and an OH group as a terminal group, many (at least a plurality of) hydrophilic group formed in the polymer and therefore, action of the above described hydrophilic

10 group 1-1 is preferably ensured. In addition, in the case where hydrophobic group other than the above described methyl group is present in the polymer, it is preferable that the hydrophilic group is close to a polymer level to increase a range of existence of the

15 hydrophilic group than the range of existence of the hydrophobic group. The balance to make a hydrophilic > hydrophobic relationship as described above may be accepted.

Meanwhile, the static negative pressure in the ink

20 supply opening is expressed by the following equation.

Static negative pressure = (height from ink supply opening to ink interface) - (capillary force of fiber on ink interface)

This capillary force proportions to  $\cos\theta$ , if a

25 contact angle, made by ink wetted with the fiber absorber, is assumed  $\theta$ . Therefore, according to presence or absence of the hydrophilic treatment of the

present invention, in ink showing a large change of the  $\cos\theta$ , it is made possible that the static negative pressure is kept to somewhat lower, namely, somewhat higher in terms of an absolute value.

5           Specifically, if the contact angle is  $10^\circ$  level, hydrophilic treatment increases about 2% in the maximum capillary force and if a combination, by which the fiber is difficult to be wetted by ink, such as the status of the contact angle  $50^\circ$  is lowered to  $10^\circ$  by  
10       hydrophilic treatment, the capillary force increases 50%. ( $\cos 0^\circ / \cos 10^\circ \approx 1.02$   $\cos 10^\circ / \cos 50^\circ \approx 1.5$ )

          Here, concerning the specific method for manufacture of the element, which has a reformed surface shown in Figs. 17A and 17B, the method by using  
15       an improver, which is a good solvent of the polymer used for surface reform and improves wettability of the treating agent to the base material, will be explained below. According to this method, after a treating liquid (surface reform solution), in which the polymer  
20       of the surface reform agent is evenly dissolved, is applied to the surface of the base material, the solvent contained in the treating liquid is removed and simultaneously, the polymer of the surface reform agent contained in this treating liquid is oriented as  
25       described above.

          More specifically, in the solvent being a good solvent for the polymer and sufficiently wettable to

the surface of the base material, a liquid (the surface treating liquid, preferably containing pure water in the case where the hydrophilic group is used as the functional group) is prepared by mixing the polymer of a predetermined quantity with a cleavage catalyst followed by application of the surface treating liquid to the surface of the base material, and evaporating and drying steps (for example, in a 60°C oven) are installed to remove the solvent contained in the surface treating liquid.

What showing sufficient wettability to the surface of the base material and containing an organic solvent, the polymer as the surface reform agent is dissolved, in the solvent is more preferable in consideration of that even application of the polymer used for surface reform is made possible. In addition, the following is exemplified as an effect thereof: the polymer as the surface reform agent is evenly dispersed in a liquid layer, which is applied when an concentration increases according to evaporation of the solvent, to present an action for keeping the status of enough dissolution. Besides, enough wetting of the base material with the surface treating liquid allows spreading out evenly the polymer of the surface reform agent to the base material. As the result, The polymer can be evenly covered over the surface having an irregular shape.

The surface treating liquid has wettability with

the surface of the base material and is a good solvent for the polymer as well as a volatile first solvent, which is the good solvent for the polymer, however, wettability thereof to the surface of the base material is relatively inferior to the first solvent. A second solvent, which shows a relatively lower volatility than the first solvent, can be employed in combination. As the example of such combination, the lately described combination of isopropyl alcohol with water is exemplified in the case where the surface of the base material consists of a polyolefin resin and polyoxyalkylene polydimethylsiloxane is used as the polymer.

Here, the effect caused by addition of an acid as the cleavage catalyst in the surface treating liquid is enumerated as follows. For example, when the concentration of an acid component rises according to evaporation of a material used in evaporating and drying steps of the surface treating liquid, the hot acid solution of the high concentration allows partial decomposition (cleavage) of the polymer used for surface reform and production of fragments of the polymer allows the orientation to a finer part of the surface of the base material. Further, in the final stage of evaporating and drying, through polymerization of the polymer of the surface reform agent by rebinding of cleaved parts of the polymer, the effect to enhance



formation of the polymer film (polymer cover or preferably monomolecular film) is expected.

Furthermore, in evaporating and drying steps of the surface treating liquid, when the concentration of the acid component rises according to evaporation of the solvent rises, the acid of the high concentration removes impurities on the surface of and around the surface of the base material and thus, the effect to form a clean surface of the base material is expected.

On such clean surface, it is expected to improve a physical attaching force of the base substance and molecules to the polymer of the surface reform agent.

In this example, in a part, the surface of the base material is decomposed by the hot acid of the high concentration, an activated point appears on the surface of the base material, and it is supposed that a secondary chemical reaction occurs to bind this activated point with fragments produced by cleavage of the above described polymer. In an occasion, it can be presumed that improvement of attaching and stabilization of the surface reform agent is partially appears on the base material by such secondary chemical adsorption of the surface reform agent with the base material.

Next, Cleavage of the main skeleton having surface energy almost equal to surface energy of the base material of the surface reform agent (including the

surface treating liquid) and the polymer film-forming step based on condensation of fragments produced by cleavage on the surface of the base material are described concerning the case, where the functional group is the hydrophilic group and hydrophilicity is imparted to the surface of hydrophobic base material, as the example, with reference to Fig. 18 to Fig. 24. Here, the hydrophilic group is that having a structure capable of hydrophilicity as a whole of the group.

Groups usable as the hydrophilic group are the hydrophilic group itself and those having a hydrophobic chain and the hydrophobic group but having a function as a group capable of imparting hydrophilicity to other structural part by substitution and locating the hydrophilic group.

Fig. 18 shows an enlarged view after application of the hydrophilic treatment liquid 58. At this point, the polymers 51 to 54 and the acid 57 being the hydrophilic treatment agent contained in the hydrophilic treatment liquid 58 are evenly dissolved in the hydrophilic treatment liquid on the surface of the base material 56. Fig. 19 shows the enlarged view of the drying step after application of the hydrophilic treatment liquid. In drying with heating in the drying step after application of the hydrophilic treatment liquid, the physical adsorbing force of the base substance 56 to the polymer 51 to 54 as the surface

reform agent is improved by that the pure surface of the base material 56 is formed by such cleaning action of the surface of the base material 56 as that the increase in concentration of the acid component according to evaporation of the solvent removes impurities on the surface of and around the surface of the base material 56. On the other hand, in drying with heating in the drying step after application of the hydrophilic treatment liquid, there is a part, of the polymer 51 to 54 of the hydrophilic treatment agent, which is cleaved by the increase in concentration of the acid component according to evaporation of the solvent.

Fig. 20 shows a diagrammatic figure of decomposition of the polymer 51 by a concentrated acid 57. Fig. 21 shows an attitude of adsorption of the hydrophilic treatment agent, decomposed by such steps, to the base material. According to further progress of evaporation of the solvent, the main skeleton part having surface energy almost equal to surface energy of the base material of fragments 51a to 54b derived from the polymer, which constitutes the hydrophilic treatment agent reached dissolution saturation, adsorbs selectively to the surface of the pure base material 56 formed by cleaning. As the result, the group 1-1, which has surface energy different from surface energy of the base material 56 contained in the surface reform

agent, is oriented to outside of the base material 56.


Consequently, on the surface of the base material 56, the main skeleton part having surface energy almost equal to surface (interface) energy of this surface is oriented. The group 1-1 having surface energy different from surface energy of the base material 56 is oriented to outside opposite to the surface of the base material 56. In this condition, in the case where the group 1-1 is the hydrophilic group, hydrophilicity is imparted to the surface of the base material 56 resulting in the surface reformed. Fig. 22 shows the diagrammatic figure of the absorbing condition of the surface reform agent to the surface of the base material after application and drying of the hydrophilic treatment liquid.

Use of such compound as polysiloxane as the polymer capable of binding with at least a part of fragments by condensation of fragments produced by cleavage creates a bond between fragments adsorbed to the surface of the base material 56 to become the polymer finally making the film of the surface reform agent stronger. Fig. 23 shows the diagrammatic figure of rebound C by such condensation reaction. In case of using polysiloxane, mechanisms of formation of fragments produced by cleavage and polymerization by condensation thereof are described below.

According to controlled drying of the surface

treatment liquid in the surface to be treated, the concentration of a diluted acid contained in this surface treatment liquid increases and the concentrated acid (for example,  $H_2SO_4$ ) cleaves siloxane bond of polysiloxane. As the result, fragments of polysiloxane and sililated sulfuric acid is produced (scheme 1). In accordance with further drying of the treating liquid presenting on the surface to be treated, the concentration of fragments contained in the surface treatment liquid increases to improve contact probability between fragments. As the result, as shown in the scheme 2, fragments are condensed to reproduce the siloxane bond. In sililated sulfuric acid as a secondary product, when the surface to be treated is hydrophobic, a methyl group of sililated sulfuric acid is oriented to the surface to be treated and a sulfonic group is oriented to the direction different from the surface to be treated, presumably resulting in some contributions to the hydrophilic property of the surface to be treated.

Scheme 1

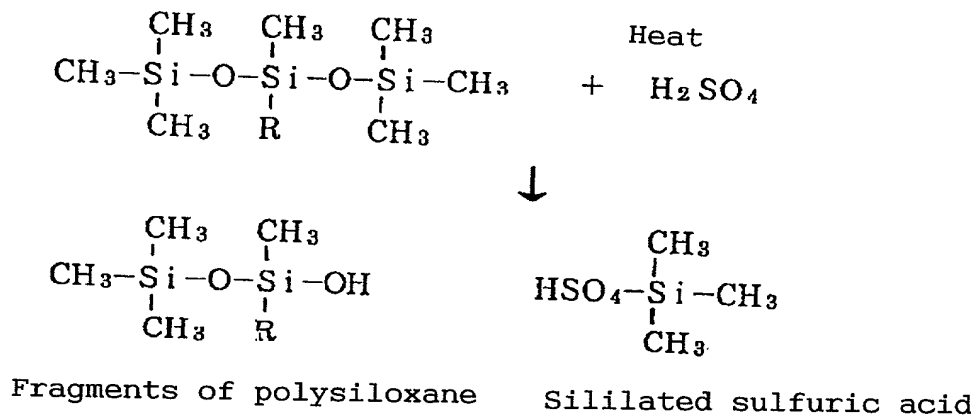

Scheme 2

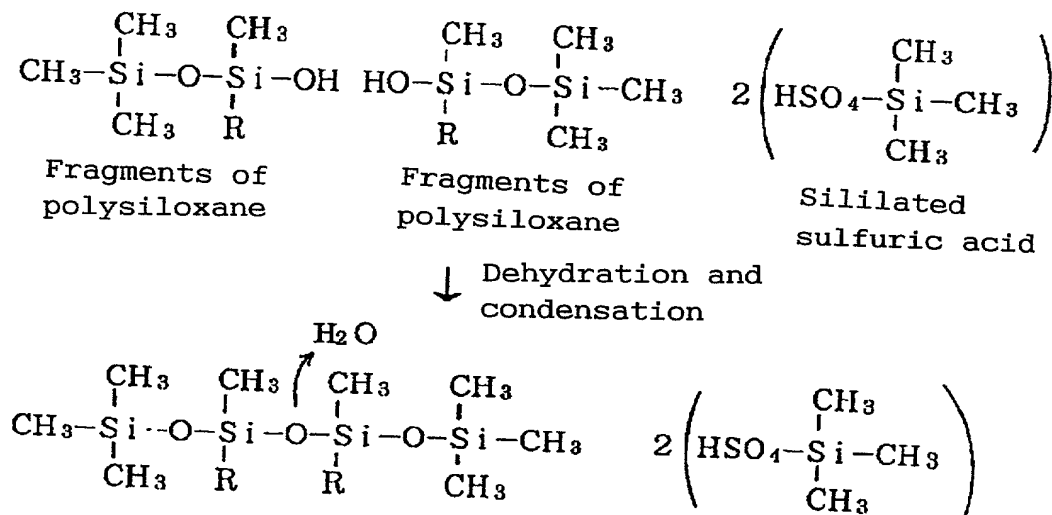


Fig. 24 shows diagrammatically an example of the condition of the surface treatment liquid in the case using the surface treatment liquid having the composition of which solvent contains water. In the case where water is contained in the solvent of the treatment liquid, in evaporation of solvent from the treatment liquid for hydrophilic treatment with heating, water and a volatile organic solvent vaporize (a gas molecule of water and the gas molecule of organic solvent are represented by 61 and 60, respectively). Where, evaporating rate of volatile organic solvent is higher than that of water and therefore, water concentration of the treatment liquid gradually increases to rise a surface tension of the treatment liquid. As the result, the interface between the surface of the base material 56 to be treated and the treatment liquid presents a difference in surface energy. On the interface between the surface of the base material 56 to be treated and the treatment liquid (water-containing layer 62) in which concentration of water has increased by evaporation, the part having almost equal surface energy to that of the surface, to be treated, of the base material 56 in fragments 51a to 54b, which is derived from the polymer as the hydrophilic treatment agent, is oriented to the surface side, to be treated, of the base material 56. On the other hand, the part having the hydrophilic group of

fragments derived from the polymer as the hydrophilic treatment agent is oriented to the water-containing layer 62 in which water concentration is increased by evaporation of the organic solvent. As the result, a  
5 predetermined orientation of fragments of the polymer is further improved.

The present invention relates to the fiber absorber for ink jet to hold ink by the negative pressure provides hydrophilic treatment to the surface  
10 of the fiber comprising the fiber absorber. According to surface reform, applicable to the present invention, for the above described element, an object of surface reform is not restricted to the fiber. Various elements and uses can be enumerated according to  
15 characteristics and kinds of the functional group, which the polymer has. The following is explanation of some examples thereof.

(1) The case where the functional group is the hydrophilic group

20 The element is that, such as the ink absorber used for the ink jet system, requiring absorbency (when the olefin fibers are contained, the above described embodiment is applicable). Hydrophilicity capable of absorbing a liquid (aqueous ink explained in the above  
25 described embodiments) instantaneously can be imparted by surface reform of the present invention. It is also effective in case of need of liquid holdability.



(2) The case where the functional group is lipophilic group

According to surface reform applied to the present invention, a function can be effectively imparted to  
5 the element necessary of lipophilicity.

(3) Other application of surface reform is all those which is capable of achievement using mechanisms of the above described principle and based on the present principle.

10 When a wettability-improving agent (for example, isopropyl alcohol: IPA) that can improve wettability to a surface of an element and wettability to be a medium for polymer; a medium allowing cleavage of polymer to occur; and a polymer that contains any of the above  
15 described functional groups and a group (or groups) having an interface energy differing from the interface energy of the functional group and almost equal to a partial surface energy of the surface of the element are used as a treatment agent, surface reform by  
20 condensation after cleavage expresses especially excellent effect to impart surely evenness and a characteristic which are not yielded by a conventional treatment agent.

In the present specification, such property  
25 excellent for wetting with liquid contained is named "lyophilic nature."

As a complementary concept of the present

invention, there is the case where a neutralizer  
(calcium stearate and hydrotalcite) used for molding or  
forming the fiber and other additives are contained in  
the fiber. By applying the above described surface  
5 reforming method, degree of both of dissolution in ink  
and deposition by ink can be reduced. In the case  
where the polymer film according to the present  
invention is formed, these problems can be solved.  
Therefore, according to the above described surface  
10 reforming method, a range of use of additives such as  
the neutralizer can be expanded and a change of  
characteristic of ink itself can be prevented and  
further, the change of characteristic of ink jet head  
itself can be prevented.

15 Fig. 36 shows an example of process chart of  
manufacture of these various elements. At start of  
manufacture (S1), the element and the treatment liquid  
are supplied and subsequently, through step of applying  
the treatment liquid to the surface (surface to be  
20 reformed) of the element to reform (S2), the step of  
removing excess matter from the surface to be reformed  
(S3), steps of concentration and evaporation of the  
treatment liquid for cleavage of the polymer and  
orientation of fragments on the surface to be reformed  
25 (S4), and the step of condensation of the polymer for  
polymerization by binding between fragments (S5), the  
element having the surface reformed is yielded (S6).

The step of concentration of the treatment liquid and the step of evaporation of the treatment liquid can be preferably carried out a continuous heating and drying steps under a temperature (for example, 60°C) lower that a boiling point of the solvent at the temperature higher than a room temperature, and in the case where polysiloxane is used in water, acid, and organic solvent (for example, isopropyl alcohol) having the hydrophilic group for reforming the surface, which consists of a polyolefin resin, be carried out for about 45 minutes to two hours, for example. These steps are carried out for about two hours, for example, in use of the aqueous solution of 40 wt% isopropyl alcohol. If water content is reduced, the drying process time can be shortened. Reduction of water content can shorten the drying process time.

In the example presented in Fig. 36, fragments are formed on the face of the element to be reformed by cleavage of the polymer. However, the treatment liquid already contained fragments can be supplied to a top of the face of the element to be reformed in order to orient it.

The composition of the treatment liquid can be, as described above, used based on a constitution comprising a wettability-improving agent, which, for example, has wettability to the face to be reformed for improving wettability of the treatment liquid to the

face to be reformed and is the good solvent for the polymer being an effective component of the surface reform agent, solvent, polymer cleavage catalysts, the functional group to impart the reform effect to the face to be reformed, and the polymer having groups to yield the attaching function to the face to be reformed.

"Example 1 of application of the principle"

Next, the following is the example of application of the principle for the above described surface hydrophilic treatment to a polypropylene-polyethylene fibrous body. Actual polypropylene-polyethylene fibrous body, for example, is that prepared in a block shape composed of the fiber having a shape usable as the ink absorber used for the purpose, in which liquid such as water is impregnated to keep ink. For example, as shown in Fig. 25A, the fibrous body 83 functioning as an absorbing holder 84 for various liquids such as ink is contained in the container 81 with the suitable shape having an opening 85 opened to atmosphere in a predetermined orientation in order to use as a liquid holding container. Such ink absorber can be preferably used in an ink tank used for the ink jet recording apparatus. Particularly, as mentioned later using Figs. 27A to 27F and Figs. 28A to 28F, in the case where the fibrous absorber 84, which is subjected to a treatment in which an excess treatment solution 86 is

squeezed from spaces of fibers by strongly pressurizing the fibrous absorber 84 in which the hydrophilic treatment solution 86 is impregnated followed by drying, is contained in the tank, it is preferable that

5 a squeezing direction of the treatment solution coincides with an compressing direction of the fibrous absorber in inserting into the tank. In other words, when the fibrous absorber compressed in squeezing work of treatment solution recovers as described above, for

10 example, even if the hydrophilic treatment agent 86B has not attached firmly to a branching point of the fiber, the defect can be canceled in inserting the fibrous absorber into the tank.

The fiber 83A is specifically constituted from a

15 biaxial fibrous body made of polypropylene and polyethylene. Individual fibers measure about 60 mm length. The biaxial fibrous body, of which sectional shape is exemplified in Fig. 26A, has almost circular (closed annular) external shape (outer circumferential

20 shape) of a section in a direction vertical to an axis and also has the core member 83b made of the polypropylene fiber having relatively high melting point to make the sheath member 83a by covering circumference thereof with polyethylene with a

25 relatively low melting point. After fibers of the fiber block made of short fibers having such sectional structure, is orientated in a same direction by using a

carding machine, heated to cause fusion of fibers. Specifically, heating is carried out under a temperature higher than the melting point of polyethylene of the sheath member and lower than the melting point of polypropylene of the core member to make a structural body in which polyethylene of the sheath member located in a position, in which fibers contact each other, is fused each other.

In the above described fibrous structural body 83, as shown in Fig. 25C, the orientation of fibers is arranged in the same direction by using the carding machine and thus, fibers are mainly arranged in a length direction (F1) continuously and fibers 83 partially contact with each other. By heating, in this contact point (point of intersection), mutual contact occurs to form a network structure resulting in having a mechanical elasticity in the orthogonal direction (F2). According to this, a tensile strength to the length direction (F1) shown in Fig. 25B increases. On the contrary, the orthogonal direction (F2) has an inferior tensile strength and the elastic structure having a recovery force against squeezing deformation.

When this fibrous structural body 83 is detailedly analyzed, as shown in Fig. 25C, individual fibers are crimped. According to crimping, a complicated network structure is formed between adjacent fibers to cause fusion. A part of crimped fibers directs to the

orthogonal direction (F2) to complete a three-dimensional fusion. Fibrous structural body 83 actually used in the present example is formed in a sliver by using a tow of the biaxial fibers in which polyethylene with the melting point of 132°C almost concentrically, as shown in Fig. 26A, covered the polypropylene fiber of the core member with the melting point of 180°C. In the fiber structural body used, the main fiber direction (F1), in which fibers are oriented and hence, if liquid is soaked, internal fluidity and an attitude of holding in a static condition are clearly differ between the fiber direction (F1) and the intersectional direction (F2).

In the fibrous absorber used in the embodiment described below, the main the fiber direction (F1) is arranged to become substantially vertical to the perpendicular direction. Therefore, a gas-liquid interface (interface between ink and gas) in the fibrous absorber 83 becomes substantially parallel to the direction of the main fiber direction F1. In the case where a change is caused by an environment change, the gas-liquid interface keeps almost horizontal direction (the direction substantially horizontal to the perpendicular direction) and therefore, after the change of environment finishes, the gas-liquid interface moves back to the original position. Consequently, variation of the gas-liquid interface to

the perpendicular direction does not increase according to a cycle number of the change of environment.

Through the main fiber direction of the fibrous absorber is determined by such manner, variation of the gas-liquid interface to the gravity direction can be prevented.

Here, if tilting to the perpendicular direction even if it is somewhat scale, the orientation direction of the fiber expresses theoretically the above described effect even if it is somewhat scale. However, in practice, in the case where it ranges approximately  $\pm 30^\circ$  to a horizontal plane, obvious effect was observed. Therefore, the expression "substantially vertical to the perpendicular direction" or "almost horizontal" must include the above described slope in the present specification.

In this example, the shape of the objective element is the fibrous structural body and has a higher liquid holding performance than the element having a plane surface and thus, the treating liquid solution is made with the following composition.

Table 1

Constituent	Composition (wt%)
(polyoxyalkylene)-poly(dimethylsiloxane)	0.40
Sulfuric acid	0.05
Isopropyl alcohol	99.55



(1) Hydrophilic treatment method for PP-PE fibrous absorber

Polypropylene-polyethylene fibrous absorber with the structure shown in Fig. 27A was soaked in the hydrophilic treatment liquid of the above described composition (Fig. 27B). Here, the treatment liquid is held in the space in the fibrous absorber.

Subsequently, the fibrous absorber is squeezed (Fig. 27C) to remove excess treatment solution held in the space of the fiber 83. The fiber absorber 83 removed from a fixing jig such as a wire net recovers the original shape (Fig. 28A) to make the surface of the fiber apply with a liquid layer 86A. The fiber, of which surface has been wetted with the liquid, was dried for 1 hour in a 60°C oven (Fig. 28B).

(Comparative example 1 and reference example 1)

In addition, as a comparative example 1, the same operation as the method described in Figs. 27A to 27F and Figs. 28A to 28F was carried out also for liquid, which was prepared in the above described fibrous body hydrophilic treatment liquid 86, containing only sulfuric acid and isopropyl alcohol. In other words, the liquid prepared by removing (polyoxyalkylene)-poly(dimethylsiloxane) from the treatment liquid shown in the Table 1. As a reference example, the PP-PE fibrous absorber untreated was used. Figs. 27D to 27F are partially enlarged figures of Figs. 27A to 27C,

respectively and Figs. 28D to 28F are partially enlarged figures of Figs. 28A to 28C, respectively.

In contrast to a weight 0.5 g of the PP-PE fibrous absorber used in the above described example 1 to which the principle was applied, the hydrophilic treatment liquid to be applied to the hole of the fibrous absorber by the above described application method is 0.3 to 0.5 g. Also in the comparative example 1, a quantity of liquid applied is the same as the example 1 to which the principle was applied.

The followings are evaluation and the results thereof about the condition of the surface treated in various fibrous absorbers obtained by the above described operation.

(1) Hydrophilicity evaluation method for the PP-PE fibrous absorber

A) Evaluation by dropping pure water using a dropping pipette

For the PP-PE fibrous absorber subjected to the treatment of the example 1 to which the principle was applied, the PP-PE fibrous absorber of the comparative example 1, and the untreated PP-PE fibrous absorber of the reference example, in dropping pure water from a top part using the dropping pipette, respectively, impregnating performance of pure water was observed.

B) Evaluation of pure water impregnation

A container with a size, in which the PP-PE

fibrous absorber can be completely put, was filled with pure water. In this container, the PP-PE fibrous absorber treated by the example 1 to which the principle was applied, the PP-PE fibrous absorber of the comparative example 1, and the untreated PP-PE fibrous absorber of the reference example were mildly put observing impregnating status of pure water into respective PP-PE fibrous absorbers.

(2) The result of hydrophilicity evaluation for the PP-PE fibrous absorber

A) The result of the evaluation by dropping pure water using a dropping pipette

In the PP-PE fibrous absorber treated by the example 1 to which the principle was applied, in dropping pure water from a top part using the dropping pipette, pure water impregnated instantaneously into the inside of the fibrous absorber.

On the other hand, in the PP-PE fibrous absorber of the comparative example 1, and the untreated PP-PE fibrous absorber of the reference example 1, though pure water was dropped from a top part using the dropping pipette, pure water did never impregnate into the fibrous absorber and formed a drop with a spherical shape put on the surface of the PP-PE fibrous absorber.

B) The result of the evaluation of pure water impregnation

When the PP-PE fibrous absorber treated by the

example 1 to which the principle was mildly put in the container filled with pure water, the PP-PE fibrous absorber gradually fell in water. From these experiments, it is at least concluded that the surface  
5 of the PP-PE fibrous absorber treated by the example described using Figs. 27A to 27F and Figs. 28A to 28F has hydrophilicity.

On the other hand, the PP-PE fibrous absorber of the comparative example 1 and the untreated PP-PE  
10 fibrous absorber of the reference example 1 were mildly put in the container filled with pure water, the PP-PE fibrous absorber of the comparative example 1 and the untreated PP-PE fibrous absorber showed a completely floating situation on pure water. Subsequently, no  
15 observation of absorbing water was made but evidently showed water repellency.

From the above described results, it is concluded that also for the PP-PE fibrous absorber, by applying the treatment liquid consisting of polyalkylsiloxane  
20 having a polyoxyalkylene oxide chain, acid, and alcohol followed by drying, a polyalkylsiloxane cover is formed as shown in Fig. 28C to allow effective surface hydrophilic treatment. As the result, it has been known that the PP-PE fibrous absorber subjected to the  
25 above described treatment can satisfactorily have the function of the ink absorber also for aqueous ink.

The above described result, in other words, in

surface reform applied to the present invention, for the purpose to obtain proof of formation of a polymer cover by attaching of polyalkylsiloxane having the polyoxyalkylene oxide chain on the surface of the PP-PE fiber, the observation by SEM photography of the surface of the fiber was carried out.

Fig. 29, Fig. 30, and Fig. 31 show enlarged SEM photographs of the surface of the untreated PP-PE fiber of the reference example 1 (the untreated PP-PE fibrous absorber). Fig. 32 shows the enlarged SEM photograph of the surface of an acid-treated PP-PE fiber of the comparative example 4 (the PP-PE fibrous absorber treated with acid and alcohol only).

Fig. 33, Fig. 34, and Fig. 35 show enlarged SEM photographs of the surface of the treated PP-PE fiber of examples (the PP-PE fibrous absorber hydrophilically treated) described using Figs. 27A to 27F and Figs. 28A to 28F.

First, in all these enlarged SEM photographs of the surface of the PP-PE fiber, an evident structural change, which is caused by attaching of an organic matter, is not found on the surface of the fiber. In fact, the detailed comparison of 2000 times enlarged photographs of the untreated PP-PE fiber of Fig. 31 with those of the PP-PE fiber hydrophilically treated of Fig. 35 shows no difference between SEM observations of the surfaces of the untreated PP-PE fiber and the

PP-PE fiber hydrophilically treated. Therefore, in the  
PP-PE fiber hydrophilically treated, (polyoxyalkylene)-  
poly(dimethylsiloxane) attaches to the surface of the  
fiber in evenly thin film form (seemingly monomolecular  
5 film) and hence, morphologically, does not allow  
discrimination from the original surface of the fiber.  
Therefore, It is concluded that no difference is found  
from the SEM observation.

On the other hand, according to viewing the SEM  
10 photograph of the PP-PE fiber, of Fig. 32, treated with  
acid and alcohol only, break of the point of  
intersection (fusion point) of fibers frequently occurs  
and many node-like structure is found in fibers. This  
change indicates the result of induction and  
15 enhancement of deterioration of PE-PP molecules of the  
surface of the fiber, particularly the PE of a  
superficial layer, caused by the acid of the high  
concentration caused by evaporation of solvent in the  
heating and drying steps and heat of the drying step  
20 itself.

On the other hand, though the hydrophilic  
treatment solution also contains the acid of the same  
concentration and same heating and drying are carried  
out, break of fiber connecting part and the node in the  
25 fiber, which are observed in the acid-treated PP-PE  
fiber treated with acid and alcohol only, are not  
found. This fact indicates that in hydrophilic

treatment of the example 1 to which the principle was applied, deterioration of PE molecules of the surface of the fiber was inhibited. This phenomenon can be explained as that an action of the acid caused break of PE molecules of the surface of the fiber and some substance and structure captured a radical when the radical produced in a molecule to inhibit chained break of PE by the radical. A possible secondary phenomenon and effect are to inhibit break of PE/PP caused by a radical chain through involvement of (polyoxyalkylene)-poly(dimethylsiloxane) attaching to the surface in capturing the radical and formation of a chemical bond to the surface of PE by capturing the radical produced.

In compilation of these descriptions, in the example 1 to which the principle was applied, it is concluded that reform of the surface of the fiber is achieved by attaching of (polyoxyalkylene)-poly(dimethylsiloxane) to the surface of the fiber in evenly thin film form. In the process, cleaning effect of the surface of the fiber is expected by the acid and the solvent contained in the solution used for hydrophilic treatment and also the action to enhance physical adsorption of the polyalkylene oxide chain is supposed. In addition to this, not lower possibility of the chemical bond of the broken part of the PE molecule to the polyalkylene oxide chain, according to break of the PE molecule by the highly concentrated

acid and heat, is presumed.

Further, the example 1, to which the principle was applied, shows that over the surface of the fiber formed from a curved surface, as shown diagrammatically in Fig. 28C, for example, the polymer cover is easily achieved. As described above, annular covering of a circumferential part (a part of which section has the outer circumference of a closed circular shape) with the polymer cover, allows preventing easy falling down of the part, of which surface has been reformed by covering with the polymer, from the element.

In some cases, the biaxial fiber, as shown in Fig. 26B, is eccentric, has a core part (core member) 1b exposed partially to the outer wall face, and includes both the surface made from the superficial layer (the sheath member) and the surface made from the core part. Also in such case, surface reform treatment according to the above described present invention allows imparting hydrophilicity to both the surfaces of the exposed part of the core part and the superficial layer. In addition, in the case where a surfactant having hydrophilic performance is simply applied and dried, partial initial hydrophilic property can be yielded. However, when mildly washing is done using pure water, the surfactant immediately dissolves in water to dissolve out finally resulting in loss of hydrophilicity.



"Examples 2 and 3 to which the principle was applied"

Next, an example of application of the principle of surface hydrophilicity treatment as above described to the PP fibrous body will be described below. Specifically, as the PP fibrous body, a fiber block, having a 2 denier fiber diameter, formed in a cubic shape of 2 cm x 2 cm x 3 cm.

First, the hydrophilic treatment solution of the following two compositions were prepared.

Table 2

Composition of hydrophilic treatment solution

Component	Composition (wt%)
(Polyoxyalkylene)-poly(dimethylsiloxane)	0.1
Sulfuric acid	0.0125
Isopropyl alcohol	99.8875

Table 3

Composition of hydrophilic treatment solution

Component	Composition (wt%)
(Polyoxyalkylene)-poly(dimethylsiloxane)	0.1
Sulfuric acid	0.0125
Isopropyl alcohol	40.0
Pure water	59.8875

The second composition (the example 3 to which the principle was applied) is made to the above described composition by adding predetermined quantities of isopropyl alcohol and pure water in this order. Also  
5 here, sulfuric acid and (polyoxyalkylene)-poly(dimehtylsiloxane) contained are those four times diluted.

Following the step of hydrophilic treatment method of the PP-PE fibrous absorber explained using Figs. 27A  
10 to 27F and Figs. 28A to 28F, the PP fibrous body (the example 2 to which the principle was applied) treated with the solution of the first composition (Table 2), in which isopropyl alcohol is used as the main solvent, water, and the PP fibrous body (the example 3 to which  
15 the principle was applied) treated with the solution of the second composition to be used as a mixing solvent of isopropyl alcohol.

(Reference example 2)

The PP fibrous body untreated was assigned to the  
20 reference example 2.

Similar to the example 1 to which the principle was applied, the surface of the PP fibrous body, of the reference example 2, untreated, having water repellency was reformed to the surface showing hydrophilicity as  
25 well as the PP fibrous body of the example 2 to which the principle was applied and the PP fibrous body of the example 3 to which the principle was applied. For

the purpose to evaluate a degree of hydrophilicity, aqueous ink ( $\gamma = 46$  dyn/cm) of 7 g was put in a Petri dish and on the surface of ink liquid, the PP fibrous body of the example 2 to which the principle was applied, the PP fibrous body of the example 3 to which the principle was applied, and the untreated PP fibrous body of the reference example 2 were put mildly.

The untreated PP fibrous body of the reference example 2 showed the status of floating on aqueous ink.

In the PP fibrous body of the example 2 to which the principle was applied and the PP fibrous body of the example 3 to which the principle was applied, ink was absorbed up from a bottom face of the fibrous body. However, if the PP fibrous body of the example 2 to which the principle was applied is compared with the PP fibrous body of the example 3 to which the principle was applied, the evident difference was found in the quantity of aqueous ink absorbed up and the PP fibrous body of the example 2 to which the principle was applied absorbed up the whole volume of ink in the Petri dish. However, in the PP fibrous body of the example 3 to which the principle was applied, about a half volume of ink left in the Petri dish.

Between the PP fibrous body of the example 2 to which the principle was applied and the PP fibrous body of the example 3 to which the principle was applied,

the total quantity of (polyoxyalkylene)-  
poly(dimehtylsiloxane) which is the polymer covering  
those surfaces, there is not a substantial prominent  
difference. This may be the result of difference  
5 between the degree of orientation of the polymers  
themselves of the cover.

For example, in the PP fibrous body of the example  
2, to which the principle was applied, the polymer  
covering the surface is almost oriented, but partially  
10 attaches in the situation in which the orientation  
contains an irregularity. On the other hand, in the PP  
fibrous body of the example 3 to which the principle  
was applied, the above described irregular orientation  
has been distinctly reduced.

15 In the hydrophilic treatment using  
(polyoxyalkylene)-poly(dimehtylsiloxane), it is  
understood that water is added to the solvent as well  
as isopropyl alcohol allows accomplishing cover with a  
dense and regularly arranged orientation. The  
20 treatment liquid itself needs to wet the surface  
thereof evenly and thus, isopropyl alcohol should be  
contained at least about 20%. Even if the content of  
isopropyl alcohol smaller than the content of 40%  
isopropyl alcohol of the above described example 3, to  
25 which the principle was applied, covering is possible.  
In other words, in the steps to evaporate and dry the  
solvent, isopropyl alcohol is lost by faster  
volatilization and during volatilization, the content

of isopropyl alcohol further decreases. In consideration of this, even if the content of isopropyl alcohol smaller than the content of 40% isopropyl alcohol, covering is possible. Besides, in view of industrial safety, the content of isopropyl alcohol is preferably less than 40%.

Furthermore, it is natural that the above described concept of the art in the above described reform method and reformed surface and element according to the present invention is applicable to all porous bodies other than fibers as the negative pressure creating member.

The negative pressure creating member adapted to hydrophilicity evenly by the method disclosed in the section as described above (Other Embodiments), concerning reabsorption of ink after removal of ink (liquid) impregnated in the negative pressure creating member as described in the Section of Problem to be Solved by the Invention, yields the effect, by which the quantity of ink held by the negative pressure creating member after reabsorption is almost equal, in other words the initial negative pressure can be recovered regardless of removed amount of and repetition frequencies of ink.

On the other hand, in the embodiment in which an liquid containing chamber is detachably installed in the negative pressure creating member-containing

chamber, concerning a holding amount of liquid in the negative pressure creating member-containing chamber in replacing the liquid containing chamber, there are various cases such as the case where liquid is held up to a position around a joint pipe being a joint part to ink leading orifice, the case where liquid is consumed up to the position around an ink supply opening, or the case where there is no ink to consume (supply).

According to application of the above described invention, by hydrophilic treatment of the negative pressure creating member in the negative pressure creating member-containing chamber by any one of methods disclosed in the above described (Other Embodiments) section, after replacing the liquid containing chamber, the negative pressure in the ink supply opening of the negative pressure creating member-containing chamber can be always recovered to the initial level (the negative pressure and quantity) regardless of frequencies of replacement and a remained quantity of liquid in the negative pressure creating member-containing chamber before replacement. Here, in consideration of partial hydrophilic treatment according to the present invention, in a treating part, there is the remained quantity of liquid in the negative pressure creating member before replacement in the position around the treating part (for example, the case where liquid around the joint pipe has been only

consumed), whole the negative pressure creating member should be not treated hydrophilically by the above described method, but the above described hydrophilic treatment may be adapted to do from the part where  
5 liquid is consumed to the part where liquid is added to.

(First embodiment)

Fig. 1 is the diagrammatic sectional view of the liquid containing container according to the first  
10 embodiment of the present invention.

The ink tank having the shape shown in Fig. 1, in which the PP fibrous body (entangled body of polypropylene fibers (hereafter, the PP fibrous body indicated by shadowing in the figure)) 2 as the  
15 negative pressure creating member for the ink jet head to do recording by ejecting liquid is arranged in an entire inside thereof and is used for containing liquid, to supply to the ink jet head, held by the PP fibrous body 2. On a top end of a tank case, an  
20 atmosphere communication orifice 3 is installed. As the PP fibrous body 2, those, in which the surface of the PP fiber entangled has been hydrophilically treated, is used. Hydrophilic treatment is not restricted to entire part of the PP fiber similar to  
25 the present example, but also may be only to the circumferential part of the orifice 4 to supply ink to the head.

For the ink tank according to the present embodiment, using ink having the following physical properties, impregnating degree and flow resistance of ink were measured.

5 (Ink used for measurement)

C. I. FB (food black) II	5.0 parts
Glycerin	5.0 parts
Ethylene glycol	5.0 parts
Urea	5.0 parts
10 IPA (isopropyl alcohol)	5.0 parts
Ion exchanged water	75.0 parts

Ink with the above described physical properties used was of the surface tension of 44 (dyne/cm) and viscosity 2.2 (cP). Components of ink are not  
15 restricted to components consisting of the above described physical properties.

For impregnating degree and flow resistance of ink, measurement was carried out for case with hydrophilic treatment (the present invention) and case  
20 without hydrophilic treatment (a conventional example). For ink impregnating degree, ink was dropped on the surface of the fibrous body to observe natural impregnation or not. Flow resistance was measured by  
25 absorbing ink from a bottom end of the liquid containing container in an absorbing volume of 3.0 (g/min) using a manometer connected to an absorbing part.



Table 4 shows the result of the above described measurement.

Table 4

	Ink impregnating degree	Flow resistance (mm Aq)
Without hydrophilic treatment	Never impregnated	30
With hydrophilic treatment	Instantaneously impregnated	15

As known from the result of the above described measurement, wettability to ink with a high surface tension is increased by hydrophilic treatment and hence, a process and facilities to inject ink in the absorber in the ink tank can be simplified. In addition, wetting status of ink can be made even. Further, the ink flow resistance in supplying ink to the ink jet head can be decreased and thus, easy development can be made easy to a printer requiring a high flow rate supply for a high speed printing.

(Second embodiment)

Figs. 2A and 2B show the diagrammatic sectional views of the liquid containing container according to the second embodiment of the present invention. In this figure, ink itself and ink held by the fibrous body are expressed with a dotted transverse line and the fibrous body itself is expressed with a dot.

The ink tank 11 with the shape shown in Figs. 2A

and 2B comprise the negative pressure creating member-containing chamber 12 and the ink containing chamber 13.

5 The negative pressure creating member-containing chamber 12 comprises a case having the ink supply opening 14 to supply ink (containing such liquid as the treatment liquid) to outside such as the ink jet head, which performs recording by ejecting liquid from the ejecting orifice, and the PP fibrous body 15 as the  
10 negative pressure creating member housed in the case. The case, furthermore, comprises the PP fibrous body 15 housed in internal part and the atmosphere communication orifice 16 to communicate with atmosphere. The ink supply opening 14 may be that  
15 previously opened and that first closed with a seal 20 and opened for use by removing the seal 20.

On the other hand, the ink containing chamber 13, in which ink is contained inside, comprises the ink leading orifice 17, around the bottom face, to lead  
20 liquid to the negative pressure creating member-containing chamber 12. On the face of the negative pressure creating member-containing chamber 12 side of a partitioning wall 18 between both chambers 12 and 13, in which the ink leading-in orifice 17 is  
25 opened, an atmosphere leading-in groove 19 to enhance gas-liquid exchange described later extends from a predetermined height of the partitioning wall 18 to the

ink leading-out orifice 17.

Herewith, the function of the atmosphere leading-in groove 19 will be explained. In Figs. 2A and 2B, when ink is consumed from the ink supply opening 14, the surface H of liquid in the PP fibrous body 15 of the negative pressure creating member-containing chamber 12 lowers. In addition, when consumption of ink from the ink supply opening 14 increases, a gas is led to the ink containing chamber 13. Then, the surface level of liquid in the PP fibrous body 15 keeps almost constant height at the top end of the atmosphere leading-in groove 19. Air enters the ink containing chamber 13 from the atmosphere communication orifice 16 through the atmosphere leading-in groove 19 and the ink leading-out orifice 17 and then, ink moves from the ink containing chamber 13 to the PP fibrous body 15 of the negative pressure creating member-containing chamber 12. Therefore, when ink is consumed from the ink jet head, ink is filled in the PP fibrous body 15 according to consumption and the PP fibrous body 15 keeps the liquid surface level resulting in the almost constant negative pressure and thus, ink supply of the ink jet head is become stable.

In the ink tank comprising the above described constitution, the PP fibrous body 15 used is that of which surface of fibers entangled has been hydrophilically treated. Hydrophilic treatment has

been applied to all the PP fibrous body or, the part  
(area 20 hydrophilically treated and indicated with  
shadowing in Fig. 3) of the PP fibrous body 15  
contacting with the atmosphere leading-in groove 19 and  
5 adjacent area thereof or the area (area 21  
hydrophilically treated and indicated with shadowing in  
Fig. 4) from this contact part to the ink supply  
opening 14.

According to the example of embodiment shown in  
10 Fig. 3, in order to hold ink stably by the part  
corresponding to the atmosphere leading-in groove 19 of  
the PP fibrous body 15 and adjacent area thereof,  
before reaching the status of gas-liquid exchange, it  
can be prevented operation of gas-liquid exchange by a  
careless air pass. Besides, ink consumption is stopped  
15 in gas-liquid exchange status, the part corresponding  
to the atmosphere leading-in groove 19 of the PP  
fibrous body 15 and adjacent area thereof are filled  
with ink to close rapidly the atmosphere leading-in  
20 groove 19.

Furthermore according to embodiment shown in Fig.  
4, on the basis of hydrophilic treatment of area from  
the part corresponding to the atmosphere leading-in  
groove 19 of the PP fibrous body 15 and adjacent area  
25 thereof to the part corresponding to the ink supply  
opening 14, in addition to the effect of the embodiment  
of Fig. 3, ink in the negative pressure creating

member-containing chamber 12 can be stably and continuously sent to the ink supply opening 14 to the ink jet head without to improve ink supply performance. The ink flow resistance in supplying ink to the ink jet head reduces and therefore, development to the printer requiring a high flow rate supply for a high speed printing becomes easy.

In embodiments shown in Fig. 3 and Fig. 4, the height of the area hydrophilically treated and contacting to the atmosphere leading-in groove 19 is not restricted to the position illustrated and may be assigned to the height optimal to carry out a stable gas-liquid exchange action. Particularly, in the case where active ink drawing to the absorber is taken into account, in the degree not disturbing the air pass in gas-liquid exchange, the area to be hydrophilically treated is preferably located around the top end of the atmosphere leading-in groove.

(Third embodiment)

Fig. 5 is the figure showing the ink jet head cartridge, which is the liquid containing container according to the third embodiment of the present invention.

The ink jet head cartridge according to the present embodiment, as shown in Fig. 5, comprises an ink jet head unit 160, a holder 150, a negative pressure regulating chamber unit 100, and an ink tank

unit 200. The negative pressure regulating chamber unit 100 is fixed to the holder 150 and downward of the negative pressure regulating chamber unit 100, the ink jet head unit 160 is fixed through the holder. The

5 negative pressure regulating chamber unit 100 comprises a negative pressure regulating chamber container 110 on which top has an opening part, a negative pressure regulating chamber lid 120 attached to the top face of the negative pressure regulating chamber container 110,

10 two absorbers 130 and 140, installed in the negative pressure regulating chamber container 110, for impregnation to hold ink. The absorbers 130 and 140 is, in the status of use of the ink jet head cartridge 70, stacked to make double layers for contacting

15 closely each other resulting in filling in the negative pressure regulating chamber container 110. A capillary force created by the absorber 140 located in the lower step is higher than the capillary force created by the absorber 130 located in the higher step and thus, the

20 absorber 140 located in the lower step shows a higher ink holding performance. Toward the ink jet head unit 160, ink in the negative pressure regulating chamber unit 100 is supplied through an ink supply tube 165.

The absorber 130 communicates with the atmosphere

25 communication orifice 115 and the absorber 140 contacts closely with the absorber 130 on the top face thereof and also contacts closely with a filter 161 on the

bottom face thereof. A boundary 113c between the absorbers 130 and 140 is located upward than the top end of a joint pipe 180 as the communicating part in the attitude in use.

5           The absorbers 130 and 140 comprise those made by entangling polyolefin resin (for example, the biaxial fiber in which PE is formed on the superficial layer of PP). The absorbers 140 used is that made by hydrophilic treatment of fibers of the part (part  
10           shadowed in Fig. 5) from around the position of a half of the opening of the joint pipe 180 to the supply opening 131.

          By locating the boundary 113c between the absorbers 130 and 140 in the top part, preferably  
15           around the top end of a joint pipe 180 similar to the present embodiment, of the joint pipe 180 in the attitude in use, in gas-liquid exchange action mentioned later, the interface between ink and gas in the absorbers 130 and 140 in gas-liquid exchange action  
20           can be assigned to the boundary 113c. As the result, the static negative pressure in the head part can be stabilized in ink supplying action. In addition, by making strength of the capillary force of the absorber 140 relatively higher than the capillary force of the  
25           absorber 130, in the case where ink exists in both the absorbers 130 and 140, after ink in the upper absorber 130 is consumed, ink in the bottom absorber 140 can be

consumed. Further, in the case where gas-liquid interface changes according to the environmental change, after first the absorber 140 and area around the boundary 113c between the absorbers 130 and 140 are  
5 filled, ink go to the absorber 130.

The ink tank unit 200 is adapted to have constitution removable from the holder 150. The joint pipe 180 which is the connecting part installed on the surface of the ink tank unit 200 of the negative  
10 pressure regulating chamber container 110 is connected to the joint orifice 230 of the ink tank unit 200 by inserting in the inside thereof. Through the connecting part of the joint pipe 180 and the joint orifice 230, the negative pressure regulating chamber  
15 unit 100 and the ink tank unit 200 are constituted to supply ink in the ink tank unit 200 to inside of the negative pressure regulating chamber unit 100. In the part in the position upper than the joint pipe 180 in the face of the ink tank unit 200 side of the negative  
20 pressure regulating chamber unit 100, an ID member 170, projected from the face thereof, for prevention of wrong installation of the ink tank unit 200 is installed integrally.

On the negative pressure regulating chamber lid  
25 120, the atmosphere communication orifice 115 to communicate inside the negative pressure regulating chamber container 110 with external atmosphere (here,



the absorber 130 housed in the negative pressure regulating chamber container 110 and external atmosphere) is formed and the space, which is formed by a rib projected from the face of the absorber 130 of the negative pressure regulating chamber lid 120, and a buffer space 116 composed of the area without ink (liquid) in the absorber, are prepared around the atmosphere communication orifice 115 in the negative pressure regulating chamber container 110.

10 In the joint orifice 230, a valve mechanism is installed. The valve mechanism comprises a first valve frame 260a, a second valve frame 260b, a valve body 261, a valve lid 262, and an energizing member 263. The valve body 261 is supported in the second valve frame 260b slidably and energized toward the first valve frame 260a side by the energizing member 263. In the status in which the joint pipe 180 is not inserted in the joint orifice 230, an edge part of the part of the first valve frame 260a side of the valve body 261 is pressed to the first valve frame 260a by an energizing force of the energizing member 263 and hence, air tightness inside the ink tank unit 200 is maintained.

25 The joint pipe 180 is inserted in the inside part of the joint orifice 230 and the valve body 261 is pressed by the joint pipe 180 to move it from the first valve frame 260a and thus, through the opening formed

on the side face of the second valve frame 260b, inside of the joint pipe 180 communicates with inside part of the ink tank unit 200. According to this, air tightness of the ink tank unit 200 is released to

5 supply ink in the ink tank unit 200 to inside of the negative pressure regulating chamber unit 100 through the joint orifice 230 and the joint pipe 180. In other words, by opening of the valve in the joint orifice

10 230, inside of the ink containing part of the ink tank unit 200 in the closed status becomes a communicating status though only the above described opening.

The ink tank unit 200 comprises the ink containing container 201 and the ID member 250. The ID member 250 is for prevention of wrong installation in installation

15 of the ink tank unit 200 and the negative pressure regulating chamber unit 100. In the ID member 250, the above described first valve frame 260a is formed. By using the first valve frame 260a, the valve mechanism is constituted to regulate flow of ink in the joint

20 orifice 230. The valve mechanism performs opening and closing actions by engaging with the joint pipe 180 of the negative pressure regulating chamber unit 100. On a front face, which becomes the negative pressure regulating chamber unit 100 side, of the ID member 250,

25 a recessed part 252 for the ID is formed to prevent wrong insertion of the ink tank unit 200.

The ink containing container 201 is a hollow

container having an almost polygonal pier shape and a negative pressure creating function. The ink containing container 201 is constituted from the case 210 and an internal bag 220. The case 210 and the  
5 internal bag 220 are adapted to be removable, respectively. The internal bag 220 has flexibility and the internal bag 220 is deformable according to leading of ink contained in inside. The internal bag 220 has a pinch-off part (fused part) 221 and is supported by the  
10 pinch-off part in the status of engaging the internal bag 220 with the case 210. In the part, around the pinch-off part 221, of the case 210, the external atmosphere communicating orifice 222 is formed to allow leading atmosphere to the space between the internal  
15 bag 220 and the case 210 through the external atmosphere communicating orifice 222.

The ID member 250 is connected to each of the case 210 and the internal bag 220 of the ink containing container 201. The ID member 250 is connected by  
20 fusion of the seal face 102 of the internal bag 220, which corresponds to the ink leading part, for the internal bag 220, of the ink containing container 201, with a corresponding face of the part of the joint orifice 230 in the ID member 250. According to this,  
25 the supply opening part of the ink containing container 201 is completely sealed to prevent leak of ink from the seal part of the ID member 250 and the ink

containing container 201 in attaching and detaching of the ink tank unit 200.

In connection of the case 210 and the ID member 250, when an engaging part 210a, formed on the top face of the case 210, and a click part 250a, formed in the top part of the ID member 250, are at least engaged, the ID member 250 is almost fixed to the ink containing container 201.

Concerning the ink jet head unit 160, recovery to a normal status is become possible by ejecting ink forcibly from the ink ejecting orifice thereof by closing the ink ejecting orifice with a cap 5020 and absorbing ink from absorbing means 5010 in a closed status of the ink ejecting orifice with the cap.

As a modified example of the third embodiment described for Fig. 5, as shown in Fig. 6, hydrophilic treatment step may be obliquely put from the position around a half of the opening of the joint pipe 180 in one side of the negative pressure regulating chamber container 110 to an angled corner of the bottom face of the negative pressure regulating chamber container 110 in which the supply opening 131 has been formed.

Next, on the basis of the embodiment of Fig. 6, movement of ink between the ink tank unit 200 and the negative pressure regulating chamber unit 100 will be explained below.

As shown in Fig. 9A, when the ink tank unit 200 is

connected to the negative pressure regulating chamber unit 100, as shown in Fig. 9B, ink in the ink containing container 201 moves to inside of the negative pressure regulating chamber unit 100 until pressures of inside of the negative pressure regulating chamber unit 100 and inside of the ink containing container 201 become equal (this status is named starting status for use).

When ink consumption is started by the ink jet head unit 160, balancing in a direction in which values of the static negative pressure created by both the internal bag 220 and the absorber 140 increases, ink held by both the internal bag 220 and the absorber 140 is consumed. Here, if ink is held by the absorber 130, ink in the absorber 130 is also consumed.

When the joint pipe is communicated with atmosphere by reduction of ink amount in the negative pressure regulating chamber unit 100 caused by the status of Fig. 9C, gas is immediately led to inside of the internal bag 220 and replacing to this, ink in the internal bag 220 moves to inside of the negative pressure regulating chamber unit 100. By this step, the absorbers 130 and 140 keep almost constant negative pressures against leading out of ink keeping the gas-liquid interface. Through such gas-liquid exchange status, when the total volume of ink in the internal bag 220 moves to inside of the negative pressure

regulating chamber unit 100, ink remained in the negative pressure regulating chamber unit 100 is consumed.

According to the above described constitution, in  
5 the polyolefin fibrous body being the ink absorber as the negative pressure creating member, ink supplying area at least from the joint pipe 180 to the supply opening 131 is hydrophilically treated. Not only  
10 restricted to that this hydrophilically treated area, as shown by shadowing in Fig. 5, is presented evenly from about a half height position of the opening of the joint pipe 180 to the bottom face of the negative pressure regulating chamber container 110, in which the supply opening 131 has been formed, but also it may be  
15 presented that for example, as shown by shadowing in Fig. 6, the hydrophilically treated area may be obliquely presented from the position around a half of the opening of the joint pipe 180 in one side of the negative pressure regulating chamber container 110 to  
20 the angled corner of the bottom face of the negative pressure regulating chamber container 110 in which the supply opening 131 has been formed. Or, as shown by shadowing in Fig. 7, the hydrophilically treated area may be presented arcuately in the shortest distance as  
25 possible from the position around a half of the opening of the joint pipe 180 in one side of the negative pressure regulating chamber container 110 to the supply

opening 131. Further, as shown by shadowing in Fig. 8,  
the following is possible: the boundary line 113c  
between the absorbers 130 and 140 is matched to the  
height around the half of the opening of the joint pipe  
5 180 to subject the whole of the absorber 140 to  
hydrophilic treatment. The example of the  
hydrophilically treated area shown in Fig. 5 to Fig. 7  
can be also applied to the absorber in the liquid  
containing container of the second embodiment shown in  
10 Figs. 2A and 2B, 3 and 4.

According to the above described embodiment, as  
shown in Fig. 9D in the gas-liquid exchange action,  
even if the liquid surface of the upper absorber 130  
lowers by disturbance by microscopic difference in  
15 density of the absorber, in the hydrophilically treated  
area (shadowed area in the figure), (a projected  
lowered liquid surface is stopped. In other words, as  
shown in Fig. 10), air (for example, an arrow A in the  
figure) in gas-liquid exchange keeps the ink flow (an  
20 arrow B in the figure) to flow in the top part of the  
joint pipe 180 and thus, the stable gas-liquid exchange  
action is carried out.

Because around the supply opening 131 is  
hydrophilically treated, ink stays always around it and  
25 therefore, discontinuous ink flow hardly takes place  
also in the supply opening 131.

Furthermore, when a new ink containing container

201 is replaced to, the hydrophilically treated area of the absorber 140 actively induces ink and therefore, head recovery can be rapidly realized by the cap 5020 and the absorbing means 5010, as explained in the section of the seventh embodiment later. In addition, ink amount required for head recovery can be controlled by changing the range of the hydrophilically treated area and number of hydrophilic groups per a unit area.

The modified example of the present embodiment, as shown in Fig. 11, may be that in which hydrophilic treatment is applied only to the opening of the joint pipe 180 of the absorber 140 and the part corresponding to peripheral area thereof. According to the example of Fig. 11, in addition to drawing of ink in gas-liquid exchange explained in the second embodiment, ink remained in the joint pipe 180 is easy to be absorbed when the ink tank unit 200 is removed and therefore, ink dropping can be prevented.

Not illustrated, but as another modified example, the absorber integrated with absorbers 130 and 140 may be arranged to make area corresponding to the absorber 140 hydrophilic to impart the capillary force corresponding to the absorber 140 and also to make the hydrophilic area according to the present invention.

In the examples of embodiments shown in Fig. 5 to Fig. 11, the height of the hydrophilically treated area contacting with the opening of the joint pipe 180 is



not restricted to the position illustrated and may be determined to the height around the pipe opening most suitable for stable gas-liquid exchange action. Particularly, in consideration of active drawing of ink to the absorber, it is preferable that the hydrophilically treated area is located in the pipe opening face in the degree of no disturbance of the air pass in gas-liquid exchange.

(Fourth embodiment)

Fig. 12 is the diagrammatic sectional figure showing the liquid containing container according to the fourth embodiment of the present invention. In this figure, ink itself and ink held by the absorber are expressed with the dotted transverse line and the absorber containing no ink is expressed with the dot.

The liquid containing container of the embodiment shown in Fig. 12 is that in order to hold ink actively to increase connectivity on ink to the ink jet head side, a pressure contacting body of the PP fiber as the member having the higher capillary force than that of the absorber 15 of the PP fiber in the negative pressure creating member-containing chamber 12 is installed in the ink supply opening 14 in the liquid containing container of the second embodiment shown in Figs. 2A and 2B.

In the present example, hydrophilic treatment was conducted for the pressure contacting body 31 subjected

to such hydrophilic treatment can be installed not only to the liquid containing container according to the second embodiment, but also to the ink supply openings of the liquid containing containers according to the first and third embodiments.

The embodiment by which the pressure contacting body is, in case of need of supplying ink to the head side with a high flow rate, installed in the ink supply openings may deteriorate distinctly ink suppliability because the flow resistance produced in the part of the pressure contacting body becomes very large. However, by applying hydrophilic treatment to the pressure contacting body, the ink flow resistance can be reduced to increase fluidity of ink finally resulting in ink supply with the high flow rate.

In addition, in the case where bubbles stay in the pressure contacting body, an ink path becomes narrow and hence, the flow resistance may further increase. However, by effect of hydrophilic treatment, staying of bubbles can be prevented and therefore, rise of the flow resistance can be suppressed.

(Fifth embodiment)

Fig. 13 is the diagrammatic sectional figure showing the liquid containing container according to the fifth embodiment of the present invention.

The liquid containing container of the embodiment shown in Fig. 13 that in which in the ink jet head

cartridge of the third embodiment, the hydrophilically treated area (the part indicated with shadowing in the figure) is located in the upper absorber 130 made from the PP fibrous body in the negative pressure regulating chamber container 110 as a plane layer crossing to a gravity direction.

Figs. 14A and 14B are figures explaining the difference between effects in presence (Fig. 14A) and absence (Fig. 14B) of the hydrophilically treated region like this example.

When ink and gas in the ink containing container 201 abruptly expand according to the environmental change, ink flows in the negative pressure regulating chamber container 110 to raise the liquid surface H. Here, as shown with the arrow in Fig. 14B, ink flows to a place, having a coarse density of fibers and a low resistance, of the absorbers 130 and 140. By this, an abrupt pressure rise in the container is eased. However, in order to express satisfactorily such pressure easing function (also buffer function), the conventional liquid containing container requires excessively large volume of the upper part of the negative pressure regulating chamber container. However, if the hydrophilically treated area like the present embodiment is prepared, the flow toward the upper part of the ink absorber according to abrupt pressure rise is captured in the hydrophilically

treated area to disperse the pressure in the direction of crossing to the gravity direction as shown in the arrow in Fig. 14A. By this, the above described buffer function can be fully expressed without the excessively large volume of the upper part of the negative pressure regulating chamber container.

Such hydrophilically treated area may be prepared as a multistep structure along with the gravity direction. The present embodiment can be applied not only to the liquid containing container according to the third embodiment, but also to the ink supply openings of the liquid containing containers according to the second embodiment.

(Sixth embodiment)

Figs. 15A to 15E are figures explaining a hydrophilically treating method for the absorber in the liquid containing container according to the sixth embodiment of the present invention.

In the present embodiment, as shown in Fig. 15D, the PP fibrous body (indicated by the dot in the figure) 2 as the negative pressure creating member for the ink jet head to do recording by ejecting liquid is arranged in an entire inside thereof and is used for containing liquid, to supply to the ink jet head, held by the PP fibrous body 2. On a top end of a tank case, an atmosphere communication orifice 3 is installed. As the PP fibrous body 2, those, in which the surface of

the PP fiber entangled has been hydrophilically treated, is used. Hydrophilic treated area, as shown with shadowing in the figure, contacts closely with the circumferential face of the orifice 4 of the container and separated from the internal surface of other parts of the container in a certain distance. The hydrophilically treated area by such manner is formed to prevent the following: in the case where there is a little space between the PP fibrous body and the inside surface of the tank, hydrophilic treatment has been applied to entire the PP fibrous body, transfer of ink is stopped between a liquid surface contacting with the inside surface of the tank and the PP fibrous body to allow leading air along with the inside surface of the tank and finally resulting in invasion of air from the ink supply opening.

Next, referring Figs. 15A to 15E, the method for forming the above described hydrophilically treated area will be described below.

First, as shown in Fig. 15B, a needle of a syringe is inserted from the atmosphere communication orifice 3 in the PP fibrous body 2 to inject the hydrophilic treatment liquid 5 in a central part of the PP fibrous body 2. Then, as shown in Fig. 15C, the hydrophilic treatment liquid 5 is sucked from the ink supply opening 4 and the hydrophilic treatment liquid 5 is exhausted before the hydrophilic treatment liquid 5

reaches an inner side face of the tank 1.

Subsequently, by drying the PP fibrous body 2, the liquid containing container with the shape shown in Fig. 15D is completed. Fig. 15E is the transverse sectional view along with an 15E-15E line of Fig. 15D.

In the ink jet head cartridge described referring the third embodiment, embodiments shown in Figs. 38A to 38C can be used.

Fig. 38B is the embodiment in which the entire area of the top absorber 130 and the bottom absorber 140 is assigned to the hydrophilically treated area in the polyolefin fibrous body being the ink absorber as the negative pressure creating member and Fig. 38A is the embodiment in which the entire area of the bottom absorber 140 only is assigned to the hydrophilically treated area. In either embodiment, the boundary face 113c of the absorbers 130 and 140 is located around the top of the joint pipe 180 in the attitude in use.

Fig. 38C is the embodiment in which a single absorber 130 only housed in the negative pressure regulating chamber container 110 and the entire bottom area is subjected to the hydrophilically treated area with almost horizontal interface 113c. The interface 113c between untreated and treated areas for hydrophilic treatment is located around the top of the joint pipe 180 in the attitude in use.

The Figs. 38A, 38B, and 38C are those freely

replaceable to the negative pressure creating member housing chamber (part) in the above described embodiment. In Fig. 38A, in viewing the absorbers 130 and 140 made from fibers as fibrous bodies, the  
5 absorber 140 is the ink supply opening side and the absorber 130 is the atmosphere communicating orifice side. And, it can be presumed that the partial hydrophilic treatment is applied to entire absorber 140.

10 In any of Figs. 38A, 38B, and 38C, for the action of the polyolefin fibrous body to water in a contact angle of  $80^\circ$  or larger, the hydrophilically treated area is located in the supply opening side and thus, aqueous ink holdability and a negative  
15 pressure-creating liquid level can be equalized to a same level in at least the absorber 140. Therefore, stabilizing the negative pressure can be realized. Similarly, in the case where hydrophilic treatment is carried out using the above described treatment liquid,  
20 keeping an excellent suppliability by reduction of the flow resistance cause by the hydrophilic group, in interruption or stop of an ink jet record, the liquid surface level is easily made horizontal and holding performance and distribution of ink are make even and  
25 therefore, the stable negative pressure can be instantaneously ensured.

Particularly in Fig. 38C, the fibrous body can be prepared as a single member and thus, it is cost low in

comparison with the case using two members; the same action as the above described action by the interface between two members is not yielded, but the effect can be yielded by the boundary between hydrophilic and hydrophobic areas.

In Fig. 38B in which the absorber 130 is also hydrophilically treated, a cause itself of ink leaking can be fundamentally solved by applying interface effect between the absorbers 130 and 140 and by a satisfactory liquid-absorbing effect even in any change of pressure.

In any Figs. 38A to 38C, a face to receive ink supplied from the joint pipe 180 is hydrophilically treated and hence, not only ink to be supplied, but also ink from a container, removable from the pipe 180, filled with ink can assuredly absorbed. In addition, all related to gas-liquid exchange and the fiber orientation described above are naturally applied to any one of Figs. 38A to 38C.

In comparison with the embodiment explained suing Fig. 8, the embodiment of Figs. 38A to 38C is that containing not only provide the effect of the embodiment of Fig. 8, but also all effects caused by the partial hydrophilic treatment according to the present invention.

In the above described embodiment, explanation was done using the example in which the joint pipe is



installed in the negative pressure creating member housing chamber. However, Even in the constitution in which the joint pipe has not been installed in the negative pressure creating member housing chamber, the ink leading orifice is pressed to inside the negative pressure creating member housing chamber to press the negative pressure creating member, respective parts can express effects described above, respectively.

(On a gradation treatment in hydrophilic treatment)

By the way, to the present invention, the constitution, in which the density of hydrophilically treated part is changed according to the position for the fibrous absorber, can be applied. The method for such treatment will be described below with reference to some examples.

First, the first method will be explained with reference to Figs. 41A and 41B. By the first method, as shown in Fig. 41A, only a part of the untreated fibrous absorber 2' is soaked in the above described hydrophilic treatment liquid 5. By this treatment, in the part soaked in the treatment liquid 5, the treatment liquid 5 attaches to whole surface of fibers of the fibrous body 2'. However, in the part not soaked in the treatment liquid 5, the treatment liquid 5 is elevated by the capillary force between fibers and hence, caused by a variability of space magnitude

between fibers, according to increase in the height from the liquid surface of the treatment liquid 5, a proportion of the part, to which the treatment liquid 5 attaches, becomes small.

5           In this status, the fibrous absorber 2' is picked up from the treatment liquid 5 to pass through the above described drying step after application of hydrophilic treatment liquid 5, as shown in Fig. 41B, the fibrous absorber 2, of which density of a part  
10           hydrophilically treated gradually decreased from the bottom end toward the top end, is yielded.

          Next, the second method will be explained with reference to Figs. 42A to 42C. In the second method, first, as shown in Fig. 42A, the fibrous absorber 2",  
15           in which the hydrophilic treatment liquid is impregnated evenly in whole parts, is prepared.

          Subsequently, as shown in Fig. 42B, a part of the fibrous absorber 2" (in the present example, the top end) is compressed. By this treatment, the hydrophilic  
20           treatment liquid in the part compressed moves to the part not compressed in accordance with that spaces between fibers of the fibrous absorber 2" becomes small. In the present example, the hydrophilic treatment liquid moves from the top end side toward the  
25           bottom end side of the fibrous absorber 2".

          Next, as shown in Fig. 42C, compression to the fibrous absorber 2" is released. By this step, the

part compressed recovers shape thereof by recovering  
force of the fibrous absorber 2". However, by the  
capillary force created by in recovery of the fibrous  
absorber 2", the hydrophilic treatment liquid attached  
5 to the surface of fibers of the part compressed is  
dispersed. As the result, the part compressed becomes  
the status in which the hydrophilic treatment liquid  
dispersed to attach to make attaching density of the  
hydrophilic treatment liquid small as the degree of  
10 compression as high. In other words, density of the  
part, to which the hydrophilic treatment liquid  
attaches, of the fibrous absorber 2" gradually increase  
from the part compressed toward the part uncompressed.

Notification should be made herewith as that  
15 amount of the hydrophilic treatment liquid impregnated  
in the fibrous absorber 2" in the status, shown in Fig.  
42A, is the amount for which, in recovery of the  
fibrous absorber 2", the hydrophilic treatment liquid  
moved to the part uncompressed does not return to the  
20 part compressed again.

Finally, by operating the above described drying  
step after application of hydrophilic treatment liquid  
for such fibrous absorber 2", the fibrous absorber, of  
which hydrophilicity reduced gradually from the part  
25 compressed toward the part uncompressed, is yielded.

Next, the third method will be described with  
reference to Fig. 43. In the third method, the fibrous

absorber 2", in which the hydrophilic treatment liquid is impregnated evenly in whole parts, is first prepared as similar as to the second method. Subsequently, the fibrous absorber 2" is mounted on an adjacent part of a rotating disc 7 to rotate the rotating disc 7. By this operation, the hydrophilic treatment liquid contained in the fibrous absorber 2" moves to outside of the rotating disc 7 by centrifugal force. In the inside, density of the part, to which the hydrophilic treatment liquid attaches, decreases. Then, density of the part, to which the hydrophilic treatment liquid attaches, increases from the inside to the outside of the rotating disc 7. Here, also in the innermost side of the fibrous absorber 2", to leave the hydrophilic treatment liquid, a rotation of the rotating disc 7 is preferably adjusted to around from 60 rpm to 300 rpm ( $1 \text{ s}^{-1}$  to  $5 \text{ s}^{-1}$ ). In addition, for efficient treatment, as shown in Fig. 43, it is preferable that a plurality of the fibrous absorber 2" is mounted on the rotating disc 7 to carry out simultaneous treatment of a plurality of the fibrous absorber 2".

Subsequently, the fibrous absorber 2" is removed from the rotating disc 7 to be subjected to the above described drying step after application of hydrophilic treatment liquid and then, the fibrous absorber, of which hydrophilicity gradually reduces from one end to the other end, can be yielded.

Next, the fourth method will be described with reference to Figs. 44A and 44B. In the fourth method, the fibrous absorber 2", in which the hydrophilic treatment liquid is impregnated evenly in whole parts, is prepared as similar as to the second method. Subsequently, in the above described drying step after application of hydrophilic treatment liquid, hot blast is blown from one end of the fibrous absorber 2". In this operation, in an initial stage, strong hot blast is blown to move hydrophilic treatment liquid in the fibrous absorber 2" to the other end. Also in this operation, similar to the third method, strength of blast wind is regulated to leave hydrophilic treatment liquid also in the other end of the fibrous absorber 2". Then, when hydrophilic treatment liquid has been moved, the strength of blast wind is adjusted to strength, by which hydrophilic treatment liquid does not move, to dry hydrophilic treatment liquid contained in the fibrous absorber 2". By this, the fibrous absorber, of which hydrophilicity reduces gradually from the other end to the one end, is yielded.

Meanwhile, according to arrangement of the shape of the ink tank and the arrangement of the supply opening, there is the case where the above described method cannot deal with. For example, as shown in Fig. 45, in the case where the tank case 21 to house the fibrous absorber 24 has a transversely long cubic shape

and the supply opening 22 is opened in the end part of the bottom face of the tank case 21, the above described method results in that hydrophilic treatment is not carried out, in spite of that a right bottom end part in the status shown in Fig. 45 is far from the supply opening 22, hydrophilic treatment is not carried out or density of the part to be hydrophilically treated becomes lower.

Such case can be solved by applying the method described for Figs. 41A and 41B. First, as shown in Fig. 46A, the one end of the untreated fibrous absorber 24' is soaked in hydrophilic treatment liquid 25. Next, the fibrous absorber 24' is picked up from hydrophilic treatment liquid 25 and as shown in Fig. 46B, the fibrous absorber 24' is rotated 90° to soak the fibrous absorber 24' again in hydrophilic treatment liquid 25 as shown in Fig. 46C. And, for the fibrous absorber 24', the above described drying step after application of hydrophilic treatment liquid is carried out and hence, as shown in Fig. 45, the fibrous absorber 24 can be yielded to reduce gradually hydrophilicity from a region A to the region E, specifically, to make hydrophilicity around two mutually adjacent faces located in the position far from the supply opening strongest and gradually weaker according to increase in the distance from there.

In case of a transversely long ink tank 20 shown

in Fig. 45, particularly in the internal bottom face of the ink tank, a space between the tank case 21 and the fibrous absorber 24 may cause to that ink in the space in the region E moves to the region A to separate from the supply opening 22. Thus, for prevention of such phenomenon, no space between the tank case 21 and the fibrous absorber 24 is preferable.

(Seventh embodiment)

Fig. 39 is the longitudinal section view of the ink tank according to the seventh embodiment of the present invention.

The ink tank 1 according to the present invention comprises the tank case 6 having the supply opening 4 to supply ink (including liquid such as waterproof reinforced liquid to apply waterproof treatment to a recording medium before ink ejection) to the recording head to record by ejecting ink from the ejecting orifice and the fibrous absorber 2, housed in the tank case 6, to hold ink under the negative pressure. The tank case 6 has the atmosphere communication orifice 3 to communicate the fibrous absorber 2 housed inside with external atmosphere.

The fibrous absorber 2 is composed of a bundle of fibers prepared in the status in which PP (polypropylene) fibers and PE (polyethylene) fibers are intermingled and the fiber orientation of those intermingled fibers is almost arranged. Length of

individual fibers composing the fibrous absorber 2 is about 60 mm. The fibers, as shown in Figs. 26A and 26B, shows the sectional shape almost concentric and formed making PE having a relatively low melting point to the sheath material 83a and PP having a relatively high melting point to the core material 83b. The fibrous absorber 2 of the present invention is fabricated by arranging fiber orientation of the fiber block made from short fibers by using the carding machine followed by heating to cut in a desired length. A heating temperature is, preferably, the temperature higher than the melting point of PE and lower than the melting point of PP.

As shown in Fig. 25A, respective fibers are oriented to the length direction (F1) by using the carding machine. The direction orthogonally crossing direction (F2) thereto has a structure having a connection by fusion of part of the contact point (intersection point) of every fiber by heating. Therefore, the fibrous absorber 2 is difficult to break by applying a tensile force in the F1 direction shown in Fig. 25A. However, in comparison with the case of F1 direction, when stretched in the F2 direction, fibers are easy to separate by break of the connecting point of fibers.

When the crimped short fiber as show in Fig. 25B is heated in the condition of oriented arrangement of fibers, the status as shown in Fig. 25C is yielded.



Here, the region  $\alpha$ , in which a plurality of fibers stacked in the direction of fibers in Fig. 25B, is fused in the intersection point as shown in Fig. 25C. As the result, fibers becomes difficult to cut in the direction of F1 shown in Fig. 25A. In addition, by using the crimped short fiber, a terminal part region ( $\beta$ ,  $\gamma$  indicated in Fig. 25B) of the short fiber is, as shown in Fig. 25C, fused with other short fibers three-dimensionally ( $\beta$ ) and left as the terminal part as it is ( $\gamma$ ). In addition, all fibers are not always arranged in the same direction and hence, short fibers originally contacting, obliquely crossing, with other short fibers ( $\epsilon$ , shown in Fig. 25B) are fused as they are after heating ( $\epsilon$ , shown in Fig. 25C). Through these processes, also along with the F2 direction, in comparison with the conventional one direction fiber bundle, fibers with higher strength is prepared.

In the fibrous absorber made of one direction fiber bundle, capillary force occurs by the space between fibers. However, in the fibrous absorber 2 according to the present embodiment, there is such main fiber direction and thus, between main fiber direction (F1) and the fiber direction (F1) orthogonally crossing fiber direction (F2), fluidity of and holding manner in a still condition of ink become different.

In the present embodiment, such fibrous absorber 2 is arranged to make the main fiber direction (F1)

substantially vertical to the perpendicular direction.  
Therefore, the gas-liquid interface (boundary between  
gas and liquid) in the fibrous absorber 2 becomes  
substantially parallel to the direction of the main  
5 fiber direction (F1). In the case where the change is  
caused by the environmental change, the gas-liquid  
interface keeps an almost horizontal direction  
(substantially vertical direction to perpendicular  
direction) and thus, the gas-liquid interface recovers  
10 the original position after the environmental change  
ceases. Consequently, as conventional, according to a  
cyclic number of the environmental change, variation of  
the gas-liquid interface to the perpendicular direction  
does not increase. By such determination of the main  
15 fiber direction of the fibrous absorber 2, variation of  
the gas-liquid interface in the gravity direction can  
be prevented.

Here, the direction of fiber orientation, even if  
inclining somewhat from the perpendicular direction,  
20 yields the above described effect even slightly,  
theoretically. Practically, when it is in a range of  
about  $\pm 30^\circ$  of the horizontal plane, the evident effect  
is confirmed. Therefore, the expression "substantially  
vertical to perpendicular direction" or "almost  
25 horizontal" is defined as includes the above described  
inclination in the present specification.

The structure of the fibrous absorber 2 is as

described above. In addition, the fibrous absorber 2 has been entirely hydrophilically treated.

Particularly in the present embodiment, hydrophilic treatment is not evenly carried out for whole of the fibrous absorber 2, but as shown in Fig. 39 diagrammatically, hydrophilic treatment is carried out to be adapted to that the density of the area hydrophilically treated is lowest around the supply opening 4 and becomes higher gradually according to increase of the distance from the supply opening 4.

Now, in Fig. 39, when according to the distance from the supply opening 4, the fibrous absorber 2 is divided in 5 regions of A to E, the region A shows the strongest hydrophilic property and regions B to E and a region more distant from the supply opening 4 show the gradually decreased hydrophilic property. Particularly in the region A, for substantially all the parts of fibers, hydrophilic treatment is conducted. In other words, in the present embodiment, the region A is the first hydrophilic treatment region in the present invention and the regions B to E are the second hydrophilic treatment region in the present invention.

The ink flow resistance in these respective regions A to E will be discussed below.

If hydrophilicity of the fibrous absorber 2 is equal among respective regions A to E, smoothness of ink flowing in respective regions A to E is same and

thus, as diagrammatically shown in Fig. 40A, in the case where the ink low resistance is analyzed dynamically, the ink path corresponds to a pipe, having an equal diameter, in proportion to a length from  
5    respective regions A to E to the supply opening 4. In other words, when hydrophilicity of the fibrous absorber 2 is equal among respective regions A to E, according to the distance from the supply opening 4, the ink low resistance increases to make ink supply to  
10    the supply opening 4 difficult.

Then, similar to the present embodiment, when hydrophilicity of the fibrous absorber 2 is decreased around the supply opening 4 and increased according to the distance from the supply opening 4, as  
15    diagrammatically shown in Fig. 40B, the ink path from respective regions A to E to the supply opening 4 becomes easy to flow ink in accordance with the distance from the supply opening 4 and therefore, corresponds to the pipe increasing diameter thereof in  
20    accordance with the distance from the supply opening 4. As the result, difficulty of movement of ink in a far position from the supply opening 4 is eased and even ink in a far position from the supply opening 4 can be flow easily to the supply opening 4.

25    By this, it is realized that ink in a far position from the supply opening 4 does not move and does not leave in place and hence, ink contained in the ink tank

1 can be efficiently used. As described above, in the ink tank 1 according to the present embodiment, ink movability in the fibrous absorber 2 is improved and therefore, such ink having a high viscosity as pigment ink can be used and can be preferably applied to the recording apparatus necessary of high speed ink supply from the supply opening 4, similar to the recording apparatus of a high recording speed.

In the present embodiment, the atmosphere communication orifice 3 is formed on the opposite face to the face, in which the supply opening 4 of the tank case 6 is opened and thus, the part with the highest hydrophilic property of the fibrous absorber 2 is located in the atmosphere communication orifice 3 side. Therefore, in injection of ink into the tank case 6 in manufacture of the ink tank 1, when ink is injected from the atmosphere communication orifice 3, ink is actively absorbed by the fibrous absorber 2 and hence, without reduction of the pressure of inside of the tank, ink can be constantly injected in.

(Eighth embodiment)

Fig. 47 is the longitudinal section view of the ink tank according to the eighth embodiment of the present invention and Fig. 48 is the sectional view (the transverse section view) along with the 48-48 line of the ink tank shown in Fig. 47.

The ink tank 21 of the present embodiment also,

similar to the seventh embodiment, has the tank case 26 having the atmosphere communication orifice 23 and the supply opening 24 and the fibrous absorber 22 housed in the tank case 26. The fibrous absorber 22, similar to

5 the seventh embodiment, is constituted by the fiber bundle of which status has the direction of almost arranged fibers of blended PP and PE fibers. The surface of fibers constituting the fibrous absorber 22 has been hydrophilically treated.

10 Difference between the seventh embodiment and the present embodiment is as follows. In the present embodiment, in order to realize that hydrophilic property of the fibrous absorber 22 becomes strong in the position around the supply opening 24 and become

15 weak in the position far from there, the hydrophilically treated part prepared by the hydrophilic treatment for the fibrous absorber 22 is located at least around the supply opening 24. The hydrophilic treatment need not to apply to the entire

20 fibrous absorber 22 and the hydrophilic treatment may not be applied to the position far from the supply opening 24. In Figs. 49 and 50A to 50C, approximate boundary between the first region and the second region and boundary between the second region and the region

25 not hydrophilically treated are indicated with solid lines. However, these are diagrammatically shown and have not clear boundaries like these.

As a rule, around the supply opening 24, in order to prevent exhaust of ink for a recording head (not illustrated), the constitution is adapted to hold ink always. For this purpose, conventionally, the following constitution was employed: the pressure contacting body of which the capillary force has been increased is installed in the supply opening 24 and the negative pressure creating member is compressed around the supply opening 24 to increase the capillary force. However, the constitution to increase the capillary force by such manner causes increase in the ink flow resistance and thus, may cause a disturbance for high speed recording in the future requiring a large flow ink supply. Then, as the present embodiment, by increasing the hydrophilic property around the supply opening 24 than other parts, the ink flow resistance around the supply opening 24 is not increased, but ink is actively held.

On the other hand, preventing ink leak from the recording head, in order to realize a good supply of ink from the ink tank 21 to the recording head, the internal pressure of the ink tank 21 requires to keep a suitable negative pressure. Here, with reference to Fig. 49, a relation of the internal pressure of the ink tank 21 with the leading amount of ink from the supply opening 24 will be discussed below. The negative pressure mentioned herewith means a total negative

pressure summed from the static negative pressure and the dynamic negative pressure.

Fig. 49 is the graph showing a relation between the internal pressure of the ink tank with an ink leading amount for the ink tank, in which the fibrous absorber hydrophilically treated to make the hydrophilic property highest around the supply opening and also to decrease gradually the hydrophilic property according to the distance from the supply opening, is housed and the ink tank, in which the fibrous absorber is not hydrophilically treated, is housed

As shown in Fig. 49, that not hydrophilically treated, as shown with the broken line, the internal pressure of the ink tank reduces in approximately linearly according to leading of ink. However, that hydrophilically treated, as shown with the solid line, in comparison with that untreated, the rate of change, namely, the rate of reduction, of the internal pressure decreases according to increase in the ink leading volume. This is because that hydrophilically treated allows easy movement of ink according to the distance of an ink level in the ink tank from the supply opening in accordance with leading of ink to cause decrease in the dynamic negative pressure in comparison with that untreated.

On the basis of the above description, by carrying out the hydrophilic treatment for the fibrous absorber



to increase in the hydrophilic property in the position around the supply opening and decrease according to the distance from the supply opening, change of the negative pressure in the ink tank according to leading of ink from the supply opening can be suppressed. This has the following advantages. As shown in Fig. 49, a limit negative pressure under which ink is not supplied from the ink tank to the recording head is assumed as  $p_L$ , the ink leading volume to reach the limit negative pressure  $p_L$  is  $V_1$  in untreated case and  $V_2$  in treated case. Therefore, that hydrophilically treated can use ink contained in the ink tank for a volume of the difference expressed by  $V_2 - V_1 = \Delta V$ . In other words, by the hydrophilic treatment conducted in the present embodiment, efficiency of use of ink in the ink tank is improved and furthermore, a running cost can be reduced. In addition, an arbitrary ink leading volume is assumed as  $V_x$ , the volume of the negative pressure changed from the initial value of the negative pressure to the value, when ink of  $V_x$  is led, is  $\Delta P_1$  for the untreated case and  $P_2$  for the treated case. As described herewith, the volume of the negative pressure changed by leading ink from beginning of ink use to exhaust of ink can be suppressed and hence, stable printing not depending on the ink leading volume can be realized.

In the present embodiment, the hydrophilic

property is highest around the supply opening 24.

Therefore, in injecting ink in manufacture of the ink tank 30, injection of ink from the supply opening 24 allows active absorption of ink to the fibrous absorber

5 22 and hence, no reduction of inside of the ink tank 30 allows stable ink injection.

Next, steps of the hydrophilic treatment of the fibrous absorber 22 in the present embodiment will be explained with reference to Figs. 50A to 50C.

10 First, as shown in Fig. 50A, the ink tank 21, in which the untreated fibrous absorber 22a is housed in the tank case 26, is prepared.

Next, as shown in Fig. 50B, the syringe 36 holding the hydrophilic treatment liquid 25 described in the eighth embodiment is inserted from the atmosphere communication orifice 23 of the ink tank 21 and, by the syringe 36, the hydrophilic treatment liquid 25 is  
15 injected in the untreated fibrous absorber 22a. By this operation, the hydrophilic treatment liquid 25 extends radially to inside of the fibrous absorber 22a.  
20

Simultaneously to injection of the hydrophilic treatment liquid 25 or in the point in which the hydrophilic treatment liquid 25 has extended in a certain area, as shown in Fig. 50C, the hydrophilic treatment liquid 25 is forcedly drawn from the supply opening 24 of the tank case 26. By this operation, the hydrophilic treatment liquid 25 is drawn in the supply  
25

opening 24 side to make content of the hydrophilic treatment liquid 25 in the fibrous absorber 22 highest in the region between the tip of the syringe 36 and the supply opening 24 and also make it small in accordance with the distance from the region.

Finally, similar to the eighth embodiment, through the drying step after application of hydrophilic treatment liquid, the ink tank 21 shown in Fig. 47 and 48 is obtained for the fibrous absorber 22 in which hydrophilic treatment liquid 25 is impregnated.

(Ninth embodiment)

Fig. 51 is the diagrammatic sectional figure showing the ink jet head cartridge, which is the liquid containing container, according to a ninth embodiment of the present invention.

The ink jet head cartridge according to the present embodiment, as shown in Fig. 51, comprises the ink jet head unit 160, the holder 150, the negative pressure regulating chamber unit 100, the ink tank unit 200, and the like. The negative pressure regulating chamber unit 100 is fixed to inside of the holder 150 and to the bottom of the negative pressure regulating chamber unit 100, the ink jet head unit 160 is fixed through the holder. The negative pressure regulating chamber unit 100 comprises the negative pressure regulating chamber container 110 of which top has an opening part, the negative pressure regulating chamber

lid 120 attached to the top face of the negative pressure regulating chamber container 110, two absorbers 130 and 140, installed in the negative pressure regulating chamber container 110, for

5 impregnation to hold ink. The absorbers 130 and 140 is, in the status of use of the ink jet head cartridge, stacked to make top and bottom two layers for contacting closely each other resulting in filling in the negative pressure regulating chamber container 110.

10 A capillary force created by the absorber 140 located in the lower step is higher than the capillary force created by the absorber 130 located in the higher step and thus, the absorber 140 located in the lower step shows a higher ink holding performance. Toward the ink

15 jet head unit 160, ink in the negative pressure regulating chamber unit 100 is supplied through an ink supply tube 165.

The absorber 130 communicates with the atmosphere communication orifice 115 and the absorber 140 contacts

20 closely with the absorber 130 on the top face thereof and also contacts closely with a filter 161 on the bottom face thereof. An boundary 113c between the absorbers 130 and 140 is located upward than the top end of a joint pipe 180 as the communicating part in

25 the attitude in use.

The absorbers 130 and 140 comprise those made by entangling polyolefin resin (for example, the biaxial

fiber in which PE is formed on the superficial layer of PP). The absorber 130 being the top one of each absorber 130 and 140 is hydrophilically treated to locate as a layer crossing to the gravity direction in the attitude in use. In Fig. 51, the region, of the absorber 130, hydrophilically treated is evenly indicated by shadowing. In the present embodiment, hydrophilic treatment is carried out to make the density of the part hydrophilically treated for fibers in the region gradually small from the bottom part to the top part.

By locating the boundary 113c between the absorbers 130 and 140 in the top part, preferably around the joint pipe 180 similar to the present embodiment, of the joint pipe 180 in the attitude in use, in gas-liquid exchange action mentioned later, the interface between ink and gas in the absorbers 130 and 140 in gas-liquid exchange action can be assigned to the boundary 113c. As the result, the static negative pressure in the head part can be stabilized in ink supplying action. In addition, by making strength of the capillary force of the absorber 140 relatively higher than the capillary force of the absorber 130, in the case where ink exists in both the absorbers 130 and 140, after ink in the upper absorber 130 is consumed, ink in the bottom absorber 140 can be consumed. Further, in the case where gas-liquid interface changes

according to the environmental change, after first the absorber 140 and area around the boundary 113c between the absorbers 130 and 140 are filled, ink goes to the absorber 130.

5           The ink tank unit 200 is adapted to have constitution removable from the holder 150. The joint pipe 180 which is the connecting part installed on the surface of the ink tank unit 200 side of the negative pressure regulating chamber container 110 is connected  
10           to the joint orifice 230 of the ink tank unit 200 by inserting in the inside thereof. Through the connecting part of the joint pipe 180 and the joint orifice 230, the negative pressure regulating chamber unit 100 and the ink tank unit 200 are constituted to  
15           supply ink contained in the ink tank unit 200 to inside of the negative pressure regulating chamber unit 100. In the part in the position upper than the joint pipe 180 in the face of the ink tank unit 200 side of the negative pressure regulating chamber unit 100, the ID  
20           member 170, projected from the face thereof, for prevention of wrong installation of the ink tank unit 200 is installed integrally.

          On the negative pressure regulating chamber lid 120, the atmosphere communication orifice 115 to  
25           communicate inside the negative pressure regulating chamber container 110 with external atmosphere, in other words, the absorber 130 housed in the negative

pressure regulating chamber container 110 with external atmosphere, is formed and the space, which is formed by a rib projected from the face of the absorber 130 of the negative pressure regulating chamber lid 120, and a  
5 buffer space 116 composed of the area without ink (liquid) in the absorber, are prepared around the atmosphere communication orifice 115 in the negative pressure regulating chamber container 110.

In the joint orifice 230, the valve mechanism is  
10 installed. The valve mechanism comprises the first valve frame 260a, the second valve body 260b, the valve body 261, the valve lid 262, and the energizing member 263. The valve body 261 is supported in the second valve frame 260b slidably and energized toward the  
15 first valve frame 260a side by the energizing member 263. In the status in which the joint pipe 180 is not inserted in the joint orifice 230, an edge part of the part of the first valve frame 260a side of the valve body 261 is pressed to the first valve frame 260a by an  
20 energizing force of the energizing member 263 and hence, air tightness inside the ink tank unit 200 is maintained.

The joint pipe 180 is inserted in the inside part of the joint orifice 230 and the valve body 261 is  
25 pressed by the joint pipe 180 to move it from the first valve frame 260a and thus, through the opening formed on the side face of the second valve frame 260b, inside

of the joint pipe 180 communicates with inside part of the ink tank unit 200. According to this, air tightness of the ink tank unit 200 is released to supply ink in the ink tank unit 200 to inside of the negative pressure regulating chamber unit 100 through the joint orifice 230 and the joint pipe 180. In other words, by opening of the valve in the joint orifice 230, inside of the ink containing part of the ink tank unit 200 in the closed status becomes a communicating status though only the above described opening.

The ink tank unit 200 comprises the ink containing container 201 and the ID member 250. The ID member 250 is for prevention of wrong installation in installation of the ink tank unit 200 and the negative pressure regulating chamber unit 100. In the ID member 250, the above described first valve frame 260a is formed. By using the first valve frame 260a, the valve mechanism is constituted to regulate flow of ink in the joint orifice 230. The valve mechanism performs opening and closing actions by engaging with the joint pipe 180 of the negative pressure regulating chamber unit 100. On the front face, which becomes the negative pressure regulating chamber unit 100 side, of the ID member 250, the recessed part 252 for the ID is formed to prevent wrong insertion of the ink tank unit 200.

The ink containing container 201 is a hollow container having an almost polygonal pier shape and a



negative pressure creating function. The ink  
containing container 201 is constituted from the case  
210 and an internal bag 220. The case 210 and the  
internal bag 220 are adapted to be removable,  
5 respectively. The internal bag 220 has flexibility and  
the internal bag 220 is deformable according to leading  
of ink contained in inside. The internal bag 220 has  
the pinch-off part (fused part) 221 and is supported by  
the pinch-off part 221 in the status of engaging the  
10 internal bag 220 with the case 220. In the part,  
around the pinch-off part 221, of the case 210, the  
external atmosphere communicating orifice 222 is formed  
to allow leading atmosphere to the space between the  
internal bag 220 and the case 210 through the external  
15 atmosphere communicating orifice 222.

The ID member 250 is connected to each of the case  
210 and the internal bag 220 of the ink containing  
container 201. The ID member 250 is connected by  
fusion of the seal face 102 of the internal bag 220,  
20 which corresponds to the ink leading part, for the  
internal bag 220, of the ink containing container 201,  
with a corresponding face of the part of the joint  
orifice 230 in the ID member 250. According to this,  
the supply opening part of the ink containing container  
25 201 is completely sealed to prevent leak of ink from  
the seal part of the ID member 250 and the ink  
containing container 201 in attaching and detaching of

the ink tank unit 200.

Concerning the case 210 and the ID member 250,  
when an engaging part 210a formed on the top face of  
the case 210 and a click part 250a formed in the top  
5 part of the ID member 250 are at least engaged, the ID  
member 250 is almost fixed to the ink containing  
container 201.

Next, movement of ink between the ink tank unit  
200 and the negative pressure regulating chamber unit  
10 100 will be explained below.

When the ink tank unit 200 is connected to the  
negative pressure regulating chamber unit 100, ink in  
the ink containing container 201 moves to inside of the  
negative pressure regulating chamber unit 100 until  
15 pressures of inside of the negative pressure regulating  
chamber unit 100 and inside of the ink containing  
container 201 become equal (this status is named  
starting status for use).

When ink consumption is started by the ink jet  
20 head unit 160, balancing in a direction in which values  
of the static negative pressure created by both inside  
of the internal bag 220 and the absorber 140 increases,  
ink held by both the internal bag 220 and the absorber  
140 is consumed. Here, if ink is held by the absorber  
25 130, ink in the absorber 130 is also consumed.

When the joint pipe is communicated with  
atmosphere by reduction of ink amount in the negative

pressure regulating chamber unit 100 caused by ink consumption, gas is immediately led to inside of the internal bag 220 and replacing to this, ink in the internal bag 220 moves to inside of the negative pressure regulating chamber unit 100. By this step, the absorbers 130 and 140 keep almost constant negative pressures against leading out of ink keeping the gas-liquid interface. Through such gas-liquid exchange status, when the total volume of ink in the internal bag 220 moves to inside of the negative pressure regulating chamber unit 100, ink remained in the negative pressure regulating chamber unit 100 is consumed.

In the ink jet head cartridge, as described above, having the negative pressure regulating chamber unit 100 and the ink tank unit 200, when ink and gas in the ink containing container 201 abruptly expand according to the environmental change, ink flows in the negative pressure regulating chamber container 110 to raise the level of ink in the negative pressure regulating chamber container 110. Here, ink flows to a place, having the low flow resistance and coarse density of fibers, of the absorbers 130 and 140. By this, the abrupt pressure rise in the container is eased. However, in order to express satisfactorily such pressure easing function (also buffer function), the conventional liquid containing container requires

excessively large volume of the upper part of the negative pressure regulating chamber container. However, if the hydrophilically treated area like the present embodiment is prepared in the absorber 130, the

5 flow toward the upper part of the ink absorber according to the abrupt pressure rise can be captured in the hydrophilically treated area to disperse it in the direction of crossing to the gravity direction as shown in the arrow in Fig. 53. By this, the above

10 described buffer function can be fully expressed without the excessively large volume of the upper part of the negative pressure regulating chamber container. In addition, particularly, by conducting hydrophilic treatment for the absorber 130 to make not even but to

15 decrease in treatment density toward the upper part, ink is captured in the hydrophilically treated area sequentially from the bottom side and thus, in the status in which ink capturing is insufficient in the hydrophilically treated area, it does not occur that

20 ink rises over the hydrophilically treated area.

In the example shown in Fig. 51, the example, in which the hydrophilically treated area is put in the part of the upper absorber 130, has been presented. Particularly, in the present embodiment, the interface

25 130c between two absorbers 130 and 140 is located in the position upper than the joint pipe 180 and thus, as shown in Fig. 53, when for whole of the upper absorber

130, hydrophilic treatment is carried out to make the hydrophilic property weak from the bottom to the upper directions, the effect similar to the above description is also yielded.

5           In the present embodiment, the ink jet cartridge, in which the negative pressure regulating chamber unit 100 and the ink tank unit 200 can be separated, has been shown. However, these may be a form inseparable. In addition, the ink containing container 201 of the  
10   ink tank unit 200 has the structure having the deformable inner bag 220, however, may the structure comprising the case 210 only. In the case where the ink containing container 201 is constituted of the case 210, in occurrence of abrupt pressure rise in the ink  
15   containing container 201 caused by the environmental change and the like, the buffering function of the ink containing container 201 itself is lost, and hence, the constitution expressing the enough buffering function of the negative pressure regulating chamber unit 100 is  
20   more preferable.

(Tenth embodiment)

Fig. 54E is the longitudinal sectional view of the ink tank, which is the tenth embodiment of the present invention.

25           The ink tank 21 of the present embodiment comprises the tank case 26 having the supply opening 24 to supply ink (including liquid such as waterproof

reinforced liquid to apply waterproof treatment to a recording medium before ink ejection) to the recording head to record by ejecting ink from the ejecting orifice and the fibrous absorber 22 housed in the tank case 26 to hold ink under the negative pressure condition. The tank case 26 is equipped with the atmosphere communication orifice 23 to communicate the fibrous absorber 22 housed in inside part and with external atmosphere.

10           The fibrous absorber 22 is totally hydrophilically treated. In the present embodiment, hydrophilic treatment is performed to whole of the fibrous absorber 22. Hydrophilic treatment is carried out to realize that an adsorbing performance of the hydrophilic treatment agent becomes strongest around the supply opening 24 and becomes weak according to the distance from the supply opening 24.

20           A method for yielding the region relatively superior in relative continuity of hydrophilic effect of the hydrophilically treated part in the above described fibrous absorber 22 and the region relatively inferior in continuity will be described with reference to Figs. 54A to 54E.

25           As shown in Fig. 54A, the untreated fibrous absorber 22 is soaked in the hydrophilic treatment agent 25, as shown in Fig. 54B, to attach the hydrophilic treatment agent 25 to the part necessary of

an initial hydrophilic property. Subsequently, the operation transferred to the drying step for the hydrophilic treatment agent 15. Here, as shown in Fig. 54C, for the place unnecessary of continuity of hydrophilic effect is subjected to the drying step lacking heating process.

Then, the place heated normally, even after hydrophilic treatment, a treatment film, of which effect is sustained, is formed on the surface of fibers. In contrast, on the place subjected to the drying step lacking heating, cleavage and condensation of the polymer contained in the hydrophilic treatment agent do not take place and hence, the hydrophilic treatment agent leaves as a lump on the surface of fibers and has not bound to the surface of fibers. The part, in which the hydrophilic treatment agent makes a lump, contributes to wettability for initial ink, however, is easy to fall down in comparison with the place subjected to heating process. Therefore, in accordance with a time sequence, the hydrophilic treatment effect is sustained around the supply opening 12 to become the region relatively strong in hydrophilic property. However, the part distant from the supply opening 12 has no sustainability of the hydrophilic treatment effect and thus, becomes the region with relatively weak hydrophilic property.

The fibrous absorber 22 is, as shown in Fig. 54D,

inserted in the tank case 26 to make the ink tank 21.  
In injecting ink in the ink tank 21, the region, of  
which initial hydrophilic effect has been increased,  
has been extended to a peripheral region of the  
5 atmosphere communication orifice 23 and therefore,  
injecting ink from other atmosphere communication  
orifice 23 become easy. And, as shown in Fig. 54E,  
after ink is injected, the part, hydrophilically  
treated, around the atmosphere communication orifice 23  
10 falls down to reduce the hydrophilic treatment effect  
and hence, the fibrous absorber 22, of which  
hydrophilic treatment effect increases toward the  
supply opening 24, is completed. Consequently, by  
adopting the constitution according to the present  
15 embodiment, as mentioned in the ninth embodiment with  
reference to Fig. 47 and the like, in addition to an  
advantage caused by increase in the hydrophilic  
treatment effect according to the distance toward the  
supply opening, initial ink injection can be made easy.

20 Next, with reference to Fig. 16, a liquid ejecting  
recording apparatus, which performs recording by  
mounting the liquid containing container according to  
the present respective embodiments, will be described  
below.

25 In Fig. 16, the liquid containing container 1000  
is fixed to support by positioning means not  
illustrated on the carriage HC to the main body of the



liquid ejecting recording apparatus IJRA and installed  
in attachably detachable form in the carriage HC. The  
recording head (not illustrated) to ejecting a  
recording drop may be previously installed in the  
5 carriage HC or may be previously installed in the ink  
supply opening of the liquid containing container 1000.

A normal and reverse rotation of a driving motor  
5130 is transmitted to a lead screw 5040 through  
driving transmission gears 5110, 5100, and 5090. By  
10 rotating these gears or engaging the carriage HC with a  
screwed groove 5050 of the lead screw 5040, a  
reciprocating movement along with a guide shaft 5030  
becomes possible.

A numeral 5020 represents a cap covering a front  
15 face of the recording head and the cap 5020 is used for  
operating drawing to recovery of the recording head  
through the opening of the cap by drawing means not  
illustrated. The cap 5020 can cover the face of an  
ejecting orifice of respective recording head by moving  
20 by a driving force transmitted through gears 5080, 5090  
and the like. Around the cap 5020, a cleaning blade  
not illustrated is installed and the blade is supported  
movably in the top and bottom directions of the figure.  
The blade is not restricted to this embodiment, but a  
25 known cleaning blade can be naturally applied to the  
present embodiment.

These capping, cleaning, and drawing recovery are

constituted to allow a desired treatment in those  
corresponding position by the action of the lead screw  
5040 when the carriage HC moves to home position  
thereof. However, if the desired action is adapted to  
5 do in a known timing, any of them can be applied to the  
present embodiment.

As described above, according to the present  
invention, in the fibrous body as the negative pressure  
creating member housed in the liquid containing  
10 container to hold the recording liquid for the liquid  
ejecting head, by that the surface of the fiber has  
polyolefin resin and the polyolefin resin has  
hydrophilic group orienting to the surface of the  
resin, wettability of the surface of the resin  
15 increases and therefore, even if the liquid used is ink  
with the high surface tension, a special step and  
facility, conventionally necessary for injection  
thereof, can be simplified. In addition, the flow  
resistance, when the recording liquid moves, decreases  
20 and hence, high flow rate supply can be realized for  
the liquid ejecting head for high speed printing.

Hydrophilic treatment for the pressure contacting  
body of fibers arranged in the supply opening part of  
the liquid containing container can reduce the ink flow  
25 resistance and increase fluidity of ink and therefore,  
ink supply of high low rate become possible. In  
addition, staying of bubbles can be prevented the case

fibrous body is made to the pressure contacting body and therefore, rise of the flow resistance can be suppressed.

5 The part corresponding to the supply opening and peripheral part thereof, of the fibrous body as the negative pressure creating member housed in the liquid containing container, is hydrophilically treated and therefore, the recording liquid exists always in the supply opening and peripheral part thereof and  
10 discontinuity of liquid supply to the head is prevented.

In addition, in the liquid containing chamber of integrally formed or attachably detachable constitution through mutual communicating part between the negative  
15 pressure creating member-housing chamber and the liquid containing chamber, a plane layer, which is located in the upper part than the communicating part between the above described negative pressure creating member-housing part and the above described liquid  
20 containing part and crosses to the gravity direction, of the fibrous body as the negative pressure creating member housed is hydrophilically treated and thus, even if liquid and gas in the liquid containing part is expanded by the environmental change, liquid flowing  
25 between fibers can be diffused in the above described hydrophilic treatment part. Therefore, without increasing a volume of the negative pressure creating

member-housing chamber, abrupt pressure rise can be fully eased.

Further, in the liquid containing chamber of integrally formed or attachably detachable constitution  
5 through mutual communicating part between the negative pressure creating member-housing chamber and the liquid containing chamber, the liquid supply region from the communicating part between the above described negative pressure creating member-housing part and the above  
10 described liquid containing part of the fibrous body as the negative pressure creating member housed to the liquid supply opening for the liquid ejecting head is hydrophilically treated and hence, even if the liquid surface in gas-liquid exchange is disturbed and lowered  
15 by microscopic difference of density of the fibrous body, the projected lowered liquid surface is stopped in the hydrophilically treated area. According to this process, liquid movement from the liquid containing part to the negative pressure creating member-housing  
20 part is not discontinued by air and therefore, stable gas-liquid exchange action is carried out. The part around the supply opening is hydrophilically treated and thus, the recording liquid exists always around there and hardly discontinued in the supply opening.  
25 Further, when a new liquid containing part is replaced to, the hydrophilically treated area of fibers draws liquid actively and therefore, the liquid ejecting head

can be smoothly recovered. Liquid quantity necessary for recovery of the liquid ejecting head can be controlled according to the magnitude of the hydrophilically treated area.

5           In the liquid containing chamber of integrally formed or attachably detachable constitution through mutual communicating part between the negative pressure creating member-housing chamber and the liquid containing chamber, regions, corresponding to the  
10           communicating part between the above described negative pressure creating member-housing part and the above described liquid containing part or the atmosphere leading groove and the near area thereof, of the fibrous body as the negative pressure creating member  
15           housed is hydrophilically treated and hence, this hydrophilically treated part stably holds liquid and thus, before the gas-liquid exchange status is reached, it can be prevented that the gas-liquid exchange action is carried out by careless air pass. When consumption  
20           of the recording liquid stops in the gas-liquid exchange status, the part corresponding to the atmosphere leading groove the above described fibrous body and peripheral part thereof can be filled with liquid to close rapidly the atmosphere communicating  
25           groove or communicating part. According to the above described functions, stable gas-liquid exchange action becomes possible. In addition, when the above

described liquid containing container is removed for replacement, liquid hardly drops than the communicating part of the above described negative pressure-creating member housing part side.

5            Besides, according to the surface reform method applied to the present invention, for the surface of entire inside part of the negative pressure-creating member, such as the porous body and a finely processed element, having a complicated shape, desired lyophilic  
10           can be applied. And, for the olefin resin, which is regarded as difficult to subject to the surface reform, lyophilic nature can be maintained for a longer period than conventional one. Further, there is hardly the negative pressure-creating member structure and an  
15           increase in a weight and the surface itself reformed can be formed as a thin layer of a molecular level, preferably the monomolecular level. Furthermore, desired reform can be freely practiced and also a manufacturing method excellent in simple and mass  
20           production performance can be provided.

            As explained above, according to the fibrous absorber of the present invention, by giving distribution to the strength of lyophilic nature and by applying lyophilic treatment, in accordance with  
25           behavior of liquid necessary in the liquid container, liquid can be held in the optimal condition and can be supplied to the liquid ejecting head.

According to the liquid container of the present invention, by housing the fibrous absorber for liquid ejection of the above described present invention, according to behavior of liquid necessary in the liquid container, if the first liquid affinity treated region of the fibrous absorber for liquid ejection is arranged in a predetermined position in the liquid container, liquid can be held in the optimal condition and can be supplied to the liquid ejecting head.

10 More specifically, when lyophilic is applied to the fibrous absorber to make lyophilic nature higher as distance as far from the supply opening, even liquid located in the position far from the supply opening can flow easily toward the supply opening and thus, efficiency of liquid use can be improved. In addition, when lyophilic is applied to the fibrous absorber around the supply opening to make lyophilic nature lower as distance as far from the supply opening, preventing increase in the flow resistance of liquid around the supply opening, continuity of liquid low toward the liquid ejecting head can be kept. In addition, the liquid container of the structure in which the negative pressure creating member-housing chamber housed the fibrous absorber communicates with the liquid containing chamber contained liquid through the communicating part, in the position upper than the communicating part of the fibrous absorber, has the

liquid affinity treated part which exists as there  
layer crossing to the gravity direction and subjected  
to hydrophilic treatment to make lyophilic nature weak  
from the bottom to top directions and thus, the buffer  
5 function, when liquid in the liquid containing chamber  
flows in the negative pressure creating member-housing  
chamber according to the environmental change, can be  
realized using the volume of the small negative  
pressure creating member-housing chamber. Furthermore,  
10 in the liquid container according to the above  
described present invention, by injecting liquid from  
the region in which lyophilic nature is higher, liquid  
can be conveniently injected in the liquid container  
unnecessary of reduction of pressure in the liquid  
15 container.

Furthermore, according to the manufacturing  
method, of the present invention, for the fibrous  
absorber for liquid ejection, the fibrous absorber, of  
which lyophilic nature has distribution, for liquid  
20 ejection, of the present invention, can be easily  
manufactured. On the other hand, the surface treatment  
for the fibrous absorber gives liquid containing a  
liquid affinity group to the predetermined position of  
the surface of the fiber and allows the liquid affinity  
25 group to bind to the surface of the fiber through  
cleaving and condensing steps and hence, reform can be  
better carried out for the surface with a complex shape



such as the surface of the fiber and lyophilic nature  
can be kept for a long period. In addition, the film  
formed on the surface is the film of monomolecular  
level and thus, a weight of the fibrous absorber hardly  
5 increases.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222  
2223  
2224  
2225  
2226  
2227  
2228